




**MODERCO**

Gymdoor 801 Series

## Technical Data Sheet Gymdoor 8010

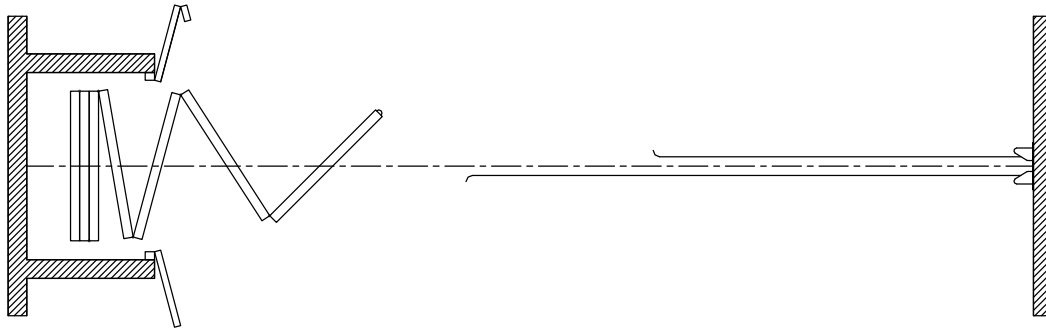

### Features & Options

#### **Standard Features**

- Electrically-operated continuously-hinged movable partition.
- Driven with Ø5 mm [3/16"] steel cable.
- STC 43 or 49.
- 76 mm [3"] nominal thickness. 1230 mm [48 1/2"] maximum width.
- 18 ga. welded steel frame.
- Roll-formed steel faces welded to panel frame.
- Panel core made up of one 25 mm [1"] semi-rigid insulation board between two 25 mm [1"] honeycomb boards.
- Trimless vertical edges.
- Vinyl tongue and groove vertical sound seals between panels.
- Final closure at pocket door.
- Continuous-contact multi-finger fixed vinyl top seals.
- Continuous-contact multi-finger adjustable vinyl bottom seals.
- Steel butt hinges.
- S5x10 steel track.
- Odd-numbered panels supported by one 4-wheeled carrier with steel tires over sealed steel ball bearing wheels.
- Vinyl wallcovering.
- Maximum height: 9220 mm [30'-3"].
- UL/ULC listed drive unit with NEMA-1 motor enclosure and controls and control enclosure conform to ANSI/NEMA ICS1, ICS 2 and ICS 6..
- 1.5 hp / 208 V / 3 ph / 60 Hz
- Travel controlled by limit switches.
- Operation by two simultaneously-activated key switches located on each side of the partition.
- 3-section pocket door fitted with limit switches to prevent operation of the partition until the pocket door is fully opened.


#### **Optional Features and Accessories**

- Powder-coated frame and/or track.
- Vertically-ribbed carpet wallcovering.
- Owner-supplied wallcovering (approval required).

**Optional Features and Accessories (cont'd)**


- ADA-compliant pass door with flush pulls and roller latch.
- Door options:
  - concealed automatic closer
  - window frame
  - door viewer
  - self-illuminated exit sign \*
  - "green running man" self-illuminated exit sign \*
  - deadbolt lock \*
 (\* An exit sign and a deadbolt lock will not be installed together on the same door.)
- Surface-mounted white marker boards.
- Surface-mounted chalk boards.
- Surface-mounted natural cork tack boards.
- Drive unit voltages:
  - 1ph – 120 V / 240 V (up to 25 panels)
  - 3 ph – 230 V / 460 V / 575 V
- Safety devices:
  - Infra-red photo-electric sensors prevent/stop operation if one of the beams is interrupted
  - Safety mats in stack area prevent/stop operation if a mass is detected
  - Safety lead edge stops operation if it meets an obstacle
- Operation by one key switch and one push button switch.

**Horizontal Seals**

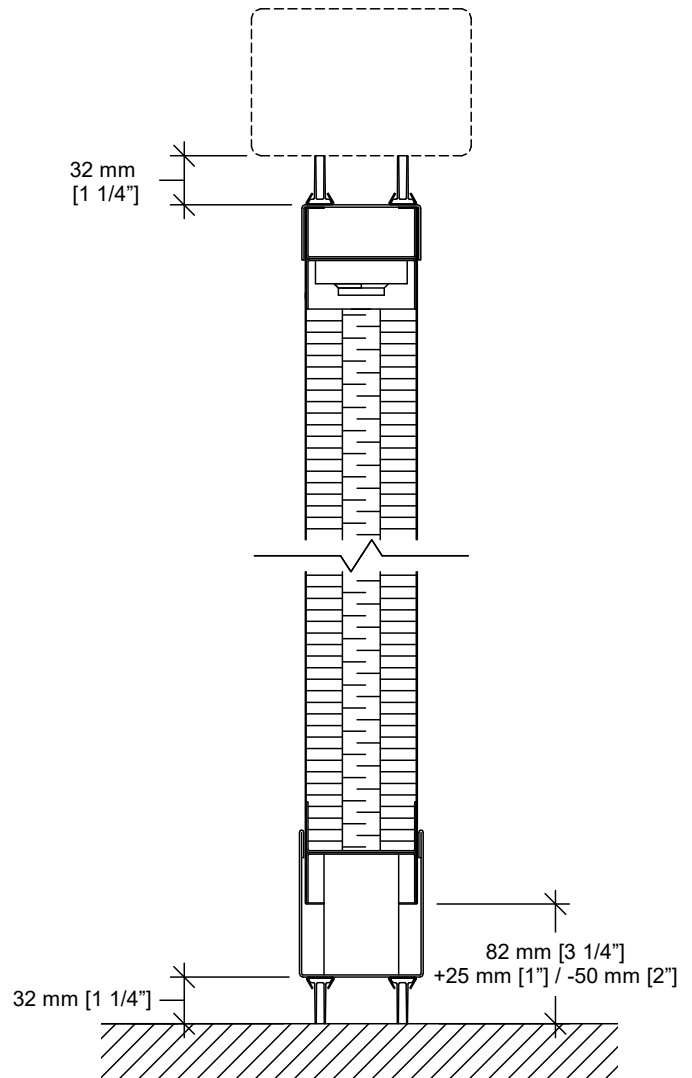


Floor clearance : 32 mm [1 1/4"]  
 Operating tolerances :  
 +25 mm / -50 mm [+1" / -2"]

### Vertical Section

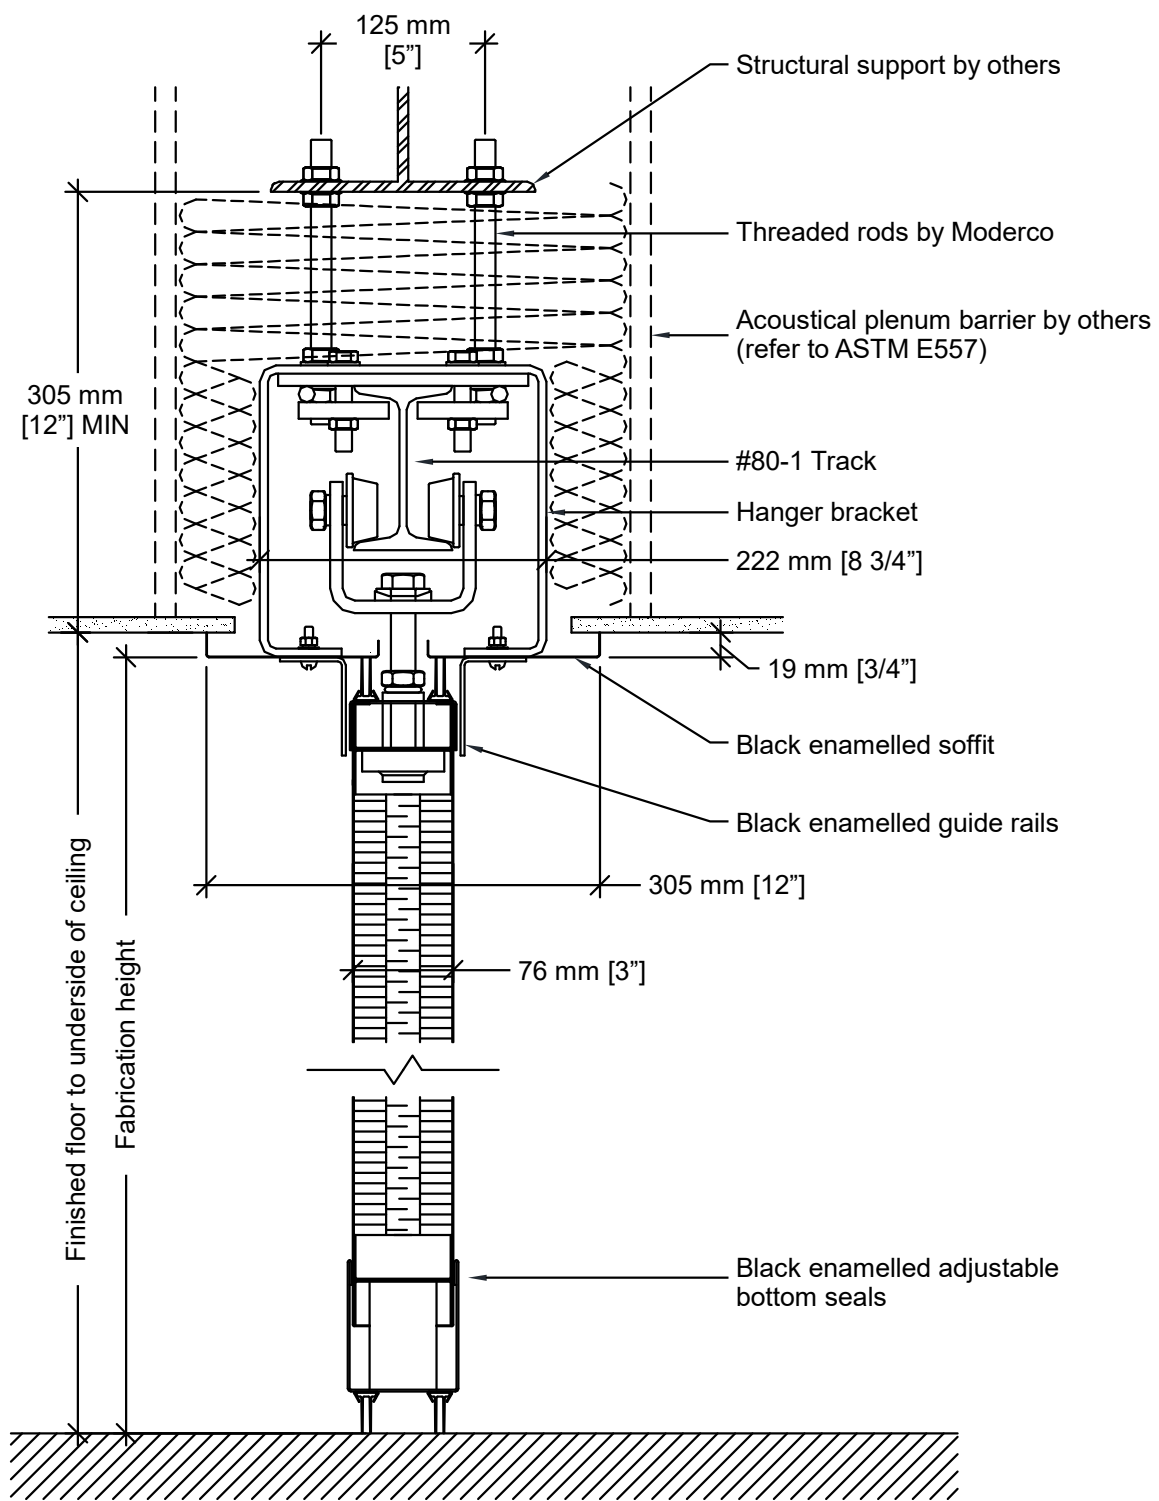


### Elevation

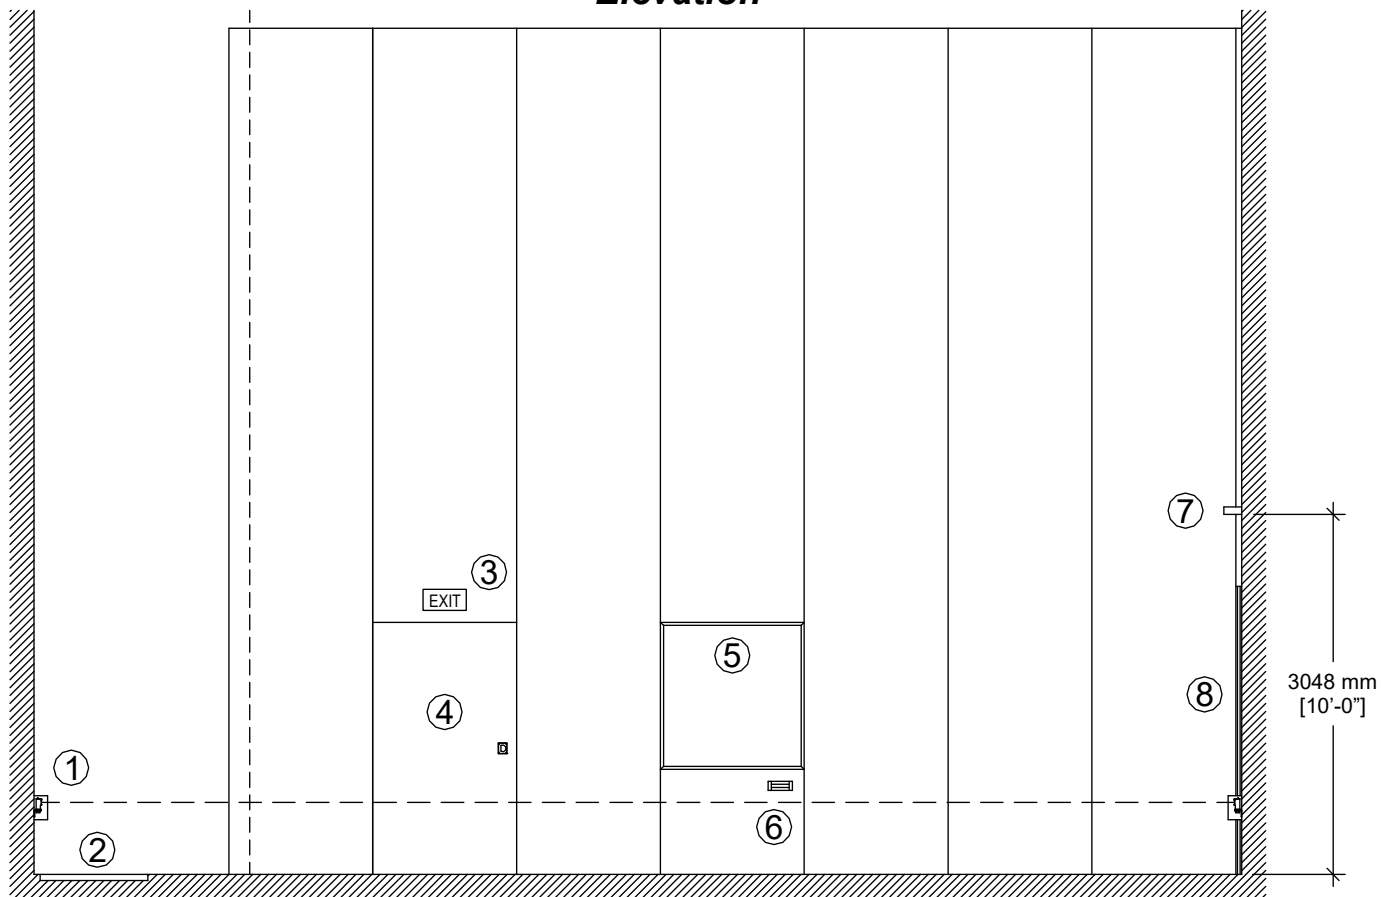


- |                                     |                 |                     |
|-------------------------------------|-----------------|---------------------|
| 1- Infra-red photo-electric sensors | 4- Passdoor     | 7- Lead-in bracket  |
| 2- Safety mats                      | 5- Work surface | 8- Safety lead edge |
| 3- Exit sign                        | 6- Eraser box   |                     |


### Pocket door

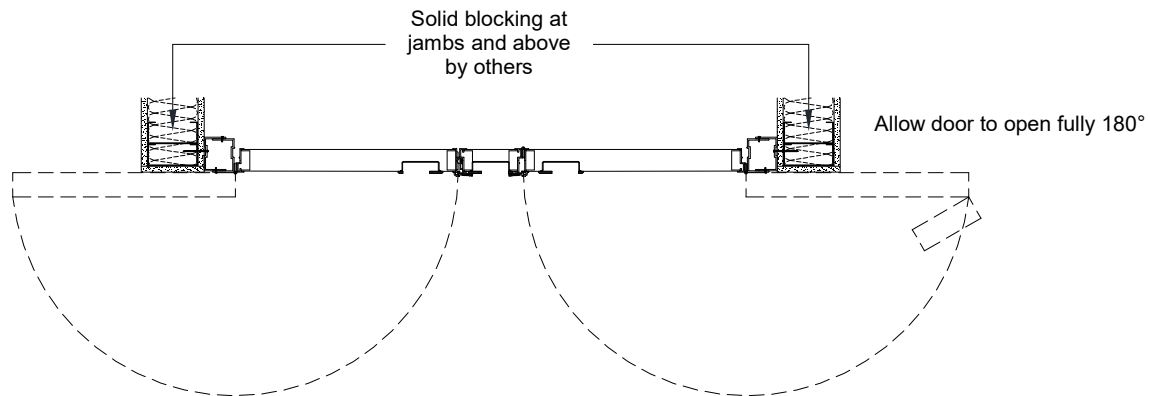


### Plan View

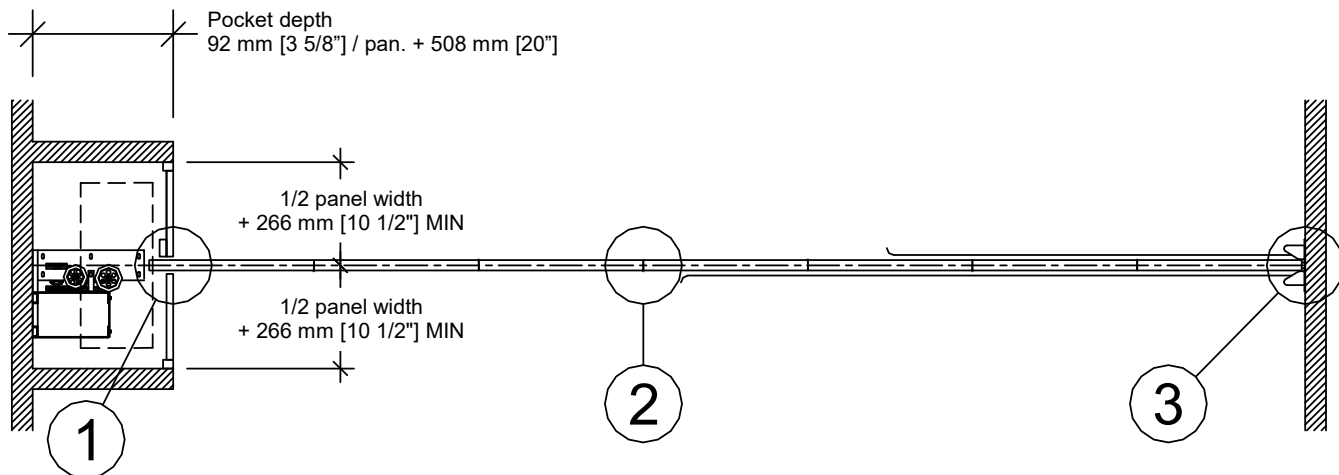

### Horizontal Section

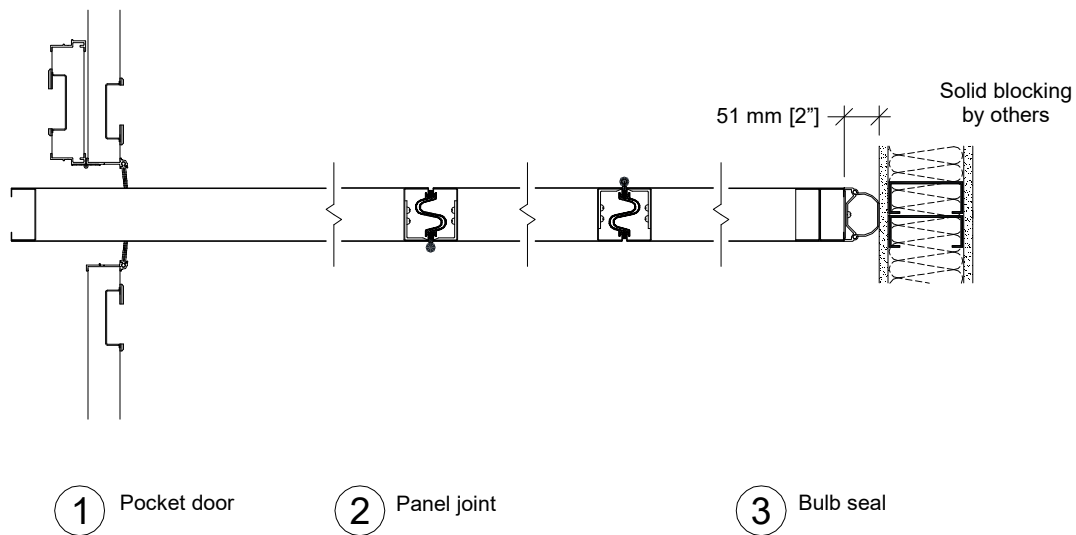

### Drive Unit

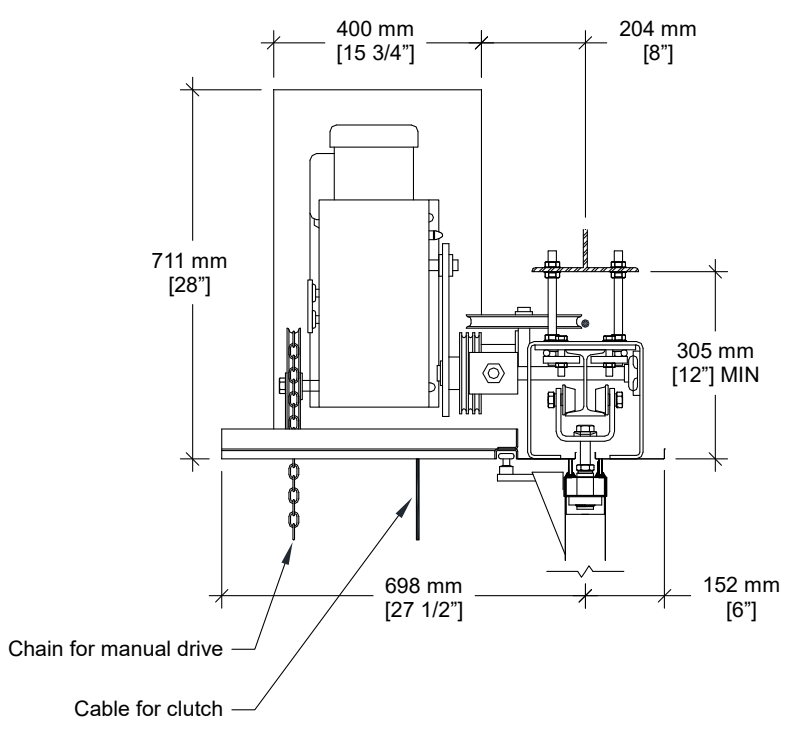

### Optional Safety Devices

