



FABRIC WALLCOVERINGS

RECOUVREMENTS DE TISSU

Due to computer screen settings, this document should not be used for final color selection. Please request samples from Moderco.



ALTAI



Phoron 116-12



Fresco 116-09



Portobello 116-06




Latte 116-08



Greige 116-01



Warm Stone 116-02




Basket 116-03



Spice 116-04




Rock 116-13




Coriander 116-11



Mirage 116-07



Triton 116-10




Metal 116-14

Due to computer screen settings, this document should not be used for final color selection. Please request samples from Moderco.




AVALON

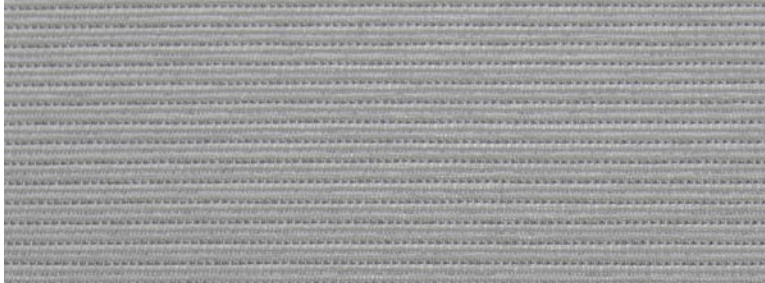

Ocean Grey 110-08



Grey Mist 110-07



Palm 110-04



China 134-01



Glaucous 134-05



Gardenia 134-02



Umber 134-10



Ice Blue 110-05



Safari 110-12

Due to computer screen settings, this document should not be used for final color selection. Please request samples from Moderco.



WOOLY



Smokey Marble 117-01



Vanilla Latte 117-02



Forged Steel 117-07



Dusky Grey 117-05



Marlin 117-10



Nickel 117-06



Iridium 117-08

Due to computer screen settings, this document should not be used for final color selection. Please request samples from Moderco.



TIRANO



St. Tropez 111-02



Winter Beach 111-01



Riverstone 111-03



Blue Haze 111-10



Cape Cod 111-04

RESOLUTION



Fossil 131-01



Silver Pointe 131-05



Tea Leaf 131-10



Nautica 131-07



Milano 131-12

Due to computer screen settings, this document should not be used for final color selection. Please request samples from Moderco.



STRATUS



Grey 39-34



Starlight 39-29



Discover 39-33



Parchment 39-24



Agate 39-01



Casarina 39-26




Sand 39-17



Plaster 39-32



Terra 39-21



Silverado 39-30



Bahamas 39-27

Due to computer screen settings, this document should not be used for final color selection. Please request samples from Moderco.



STRATUS



Truffle 39-22



Olive Grove 39-25



Laguna 39-37



Gated 39-35



Iron Ore 39-12



Glacier 39-09



Wilderness 39-36



Armor 39-39



Graphite 39-10



Pepper 39-40



Element 39-38



Technical Data

	<u>Altai</u>	<u>Avalon</u>	<u>Wooly</u>	<u>Tirano</u>	<u>Resolution</u>	<u>Stratus</u>
Contents	olefin/polyester	olefin/polyester	polyester	polyester	olefin/polyester	olefin/polyester
Weight (oz./lin.yd)	17	18	15	19	18	13
Backing	acrylic	acrylic	acrylic	acrylic	acrylic	acrylic
Finish	Crypton®Wall	Crypton®Wall	Crypton®Wall	Crypton®Wall	Crypton®Wall	Teflon®
Abrasion (cycles)	100,000	100,000	100,000	100,000	100,000	30,000
Flame Spread	20	20	20	20	20	20
Smoke Developed	50	50	50	50	50	50
Recycled Content (Post - Pre)	100% (26% - 74%)	43% (10% - 33%)	57% (20% - 37%)	69% (20% - 49%)	20% (0% - 20%)	50% (0% - 50%)
Greenguard Gold	Yes	Yes	Yes	Yes	Yes	No

Flammability

All patterns meet Class A requirements in accordance with ASTM E-84.

All patterns meet Corner Burn requirements per UBC 8-2/NFPA 265.

Toxicity: MEA 279-90M

Colorfastness to light

All patterns Grade 4.0 minimum at 40 hours AATCC 16-A.

Abrasion Resistance

All patterns meet Heavy-Duty contract upholstery requirements per ASTM D4157-Wynzenbeek.

Wet & Dry Crocking

All patterns minimum Grade 3.0 AATCC 8.



Données Techniques

	<u>Altai</u>	<u>Avalon</u>	<u>Wooly</u>	<u>Tirano</u>	<u>Resolution</u>	<u>Stratus</u>
Contenu	olefine/polyester	olefine/polyester	polyester	polyester	olefine/polyester	olefine/polyester
Poids (oz./verge lin.)	17	18	15	19	18	13
Endos	acrylique	acrylique	acrylique	acrylique	acrylique	acrylique
Finition	Crypton®Wall	Crypton®Wall	Crypton®Wall	Crypton®Wall	Crypton®Wall	Teflon®
Abrasion (cycles)	100,000	100,000	100,000	100,000	100,000	30,000
Propagation de la flamme	20	20	20	20	20	20
Émission de fumée	50	50	50	50	50	50
Contenu Recyclé (Post - Pré)	100% (26% - 74%)	43% (10% - 33%)	57% (20% - 37%)	69% (20% - 49%)	20% (0% - 20%)	50% (0% - 50%)
Greenguard Gold	Oui	Oui	Oui	Oui	Oui	Non

Inflammabilité

Tous les tissus rencontrent les critères de la Classe A selon la norme ASTM E-84.

Tous les tissus rencontrent les critères "Corner Burn" selon les normes UBC 8-2/NFPA 265.

Toxicité: MEA 279-90M

Résistance de couleur à la lumière

Tous les tissus sont de Grade 4.0 à 40 heures selon le test AATCC 16-A.

Resistance à l'abrasion

Tous les tissus rencontrent les critères de Recouvrements Muraux à Haut Rendement selon la norme ASTM D4157-Wynzenbeek.

Frottement Sec & Mouillé

Tous les tissus sont de Grade 3.0 selon le test AATCC 8.