

Technical Data Sheet Crystal 241 – STC 54



Features & Options

Standard Features

- Manually-operated individual-panel glass movable partition.
- STC 54.
- 102 mm [4"] nominal thickness. 1230 mm [48 1/2"] maximum width.
- · Clear-anodized steel-reinforced aluminum frame.
- Protective trims on the entire perimeter.
- Combination aluminum and vinyl tongue and groove vertical sound seals between panels.
- Final closure by telescopic jamb.
- Type MM-1 horizontal seals with fixed top sweeps:
 - Manually-operated, simultaneously-activated top and bottom retractable seals.
 - Bottom seals provide a floor clearance of 25 mm [1"].
- Clear-anodized 6063-T6 alloy aluminum track.
- Each panel supported by two carriers made up of two horizontally-aligned precision-ground hardened steel ball bearing wheels with nylon tires.
- 10 mm [3/8"] clear laminated tempered glass faces.

Maximum height: 3110 mm [10'-2 1/2"].

Optional Features and Accessories

- Type MM-1.5 horizontal seals with fixed top sweeps:
 - Manually-operated, simultaneously-activated top and bottom retractable seals.
 - Bottom seals provide a floor clearance of 38 mm [1 1/2"].
- Powder-coated frame and/or track.
- Glass finishes: stained, colored, acid washed, frosted, etc.
- Battery-powered electrically tilting blinds operated by remote control.
- Inset white marker boards / chalk boards / natural cork tack boards.
- Chalk tray.
- Acoustical or non-acoustical pocket door.



Optional Features and Accessories (cont'd)

Final closure by ADA-compliant pivot panel.

Pivot panel options:

- panic bar
- panic bar with lockable lever
- deadbolt lock
- ADA-compliant full-height hinged door with flush pulls and roller latch.

Deadbolt lock available as an option.


 ADA-compliant u-shaped door with flush pulls and roller latch.

Pass door options:

- concealed automatic closer
- panic bar (concealed automatic closer included)
- panic bar with lockable lever (concealed automatic closer included)
- self-luminous "Running Man" exit sign with green faceplate (standard outside USA, optional in USA)
- photoluminescent "EXIT" sign with red faceplate (standard in USA, optional elsewhere)
- photoluminescent "EXIT" sign with green faceplate (optional)
- self-luminous "EXIT" sign with red faceplate (optional)
- self-luminous "EXIT" sign with green faceplate (optional)
- deadbolt lock (not available with an Exit sign)



Horizontal Seals

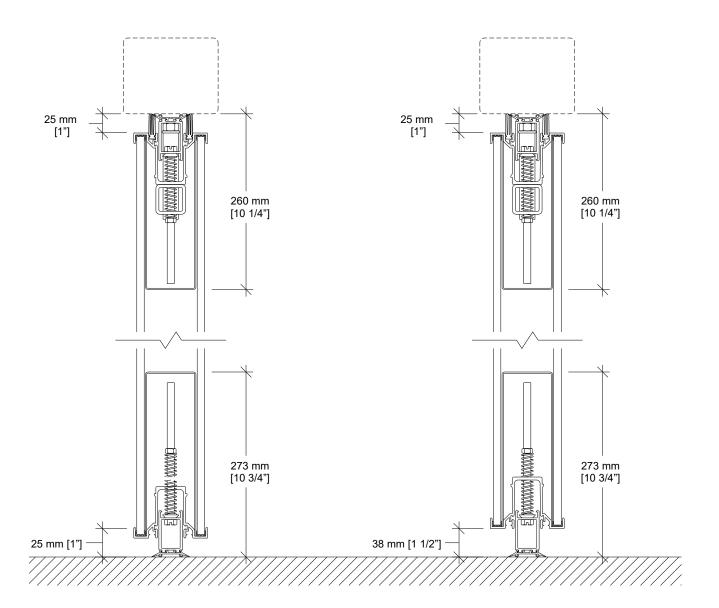


Type MM-1 with fixed top sweeps

Floor clearance : 25 mm [1"] Operating tolerances: +0 mm / -15 mm [+0" / -5/8"]

Type MM-1.5 with fixed top sweeps Floor clearance : 38 mm [1 1/2"] Operating tolerances : +0 mm / -19 mm [+0" / -3/4"] (+0 mm / -12 mm [+0" / -1/2"] if the partition has a pass through door)




Vertical Section

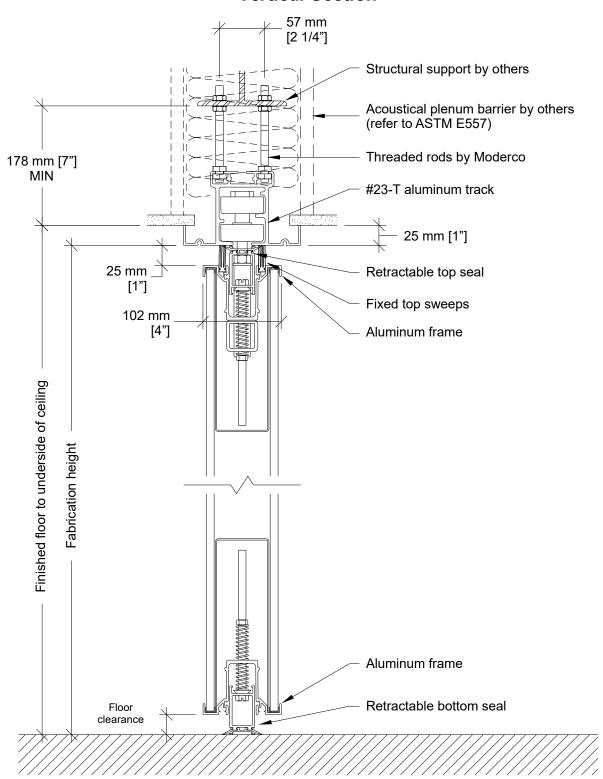



Track Options

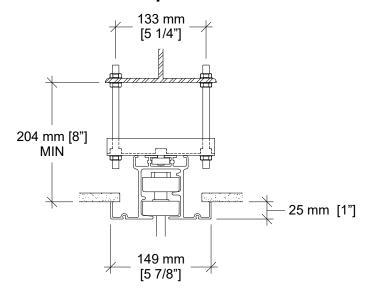



Optional hanger bracket


Required for installations where the topmost nuts cannot be used for adjustment.



Elevation

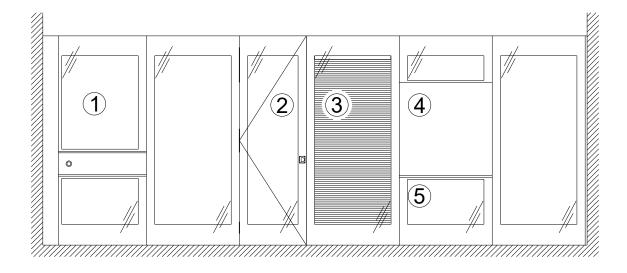







- 1- Telescopic closure panel
- 2- Full-height hinged door (optional)
- 3- Electrically tilting blinds operated by remote control (optional)
- 4- Work surfaces (optional)
- 5- Marker tray (optional)
- 6- Pivot panel (optional)
- 7- U-shaped pass door (optional)



Plan Views

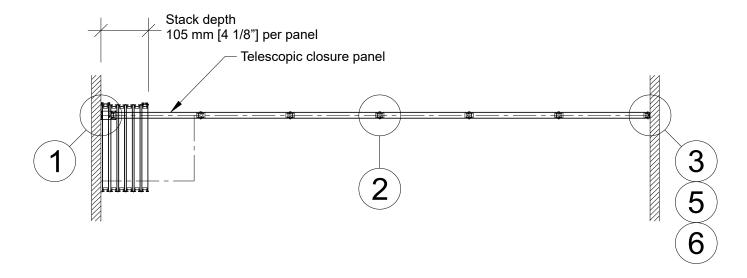


Telescopic closure panel

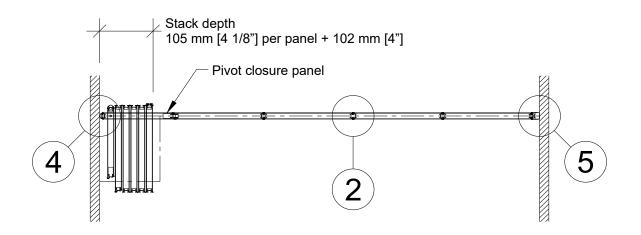


Pivot closure panel



Horizontal Sections

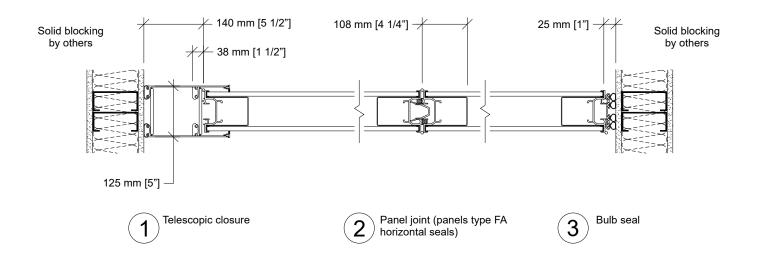

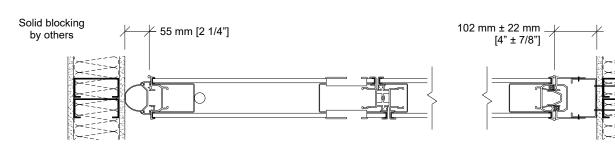

Pivot closure panel with recessed pulls and roller latch (optional)

Wall jamb (optional)




End cap (available on panels with manual seals only)

Solid blocking


by others




Typical Layouts

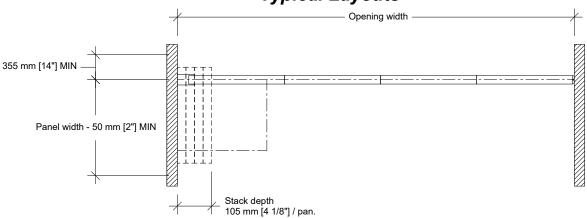

Wall to wall Side Stack - telescopic closure

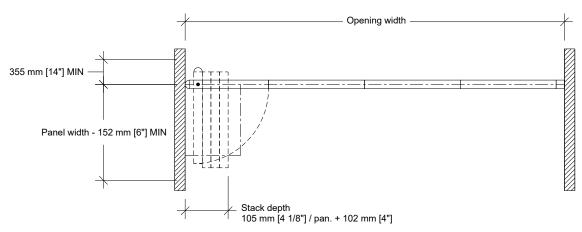


Wall to wall Side Stack - pivot closure

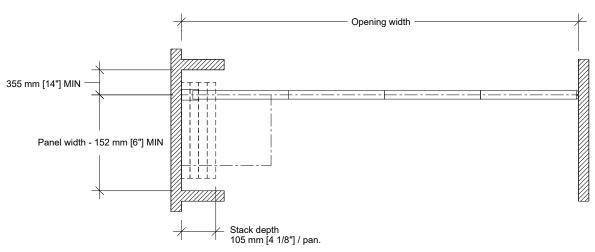


Pocket




Typical Layouts (cont'd)

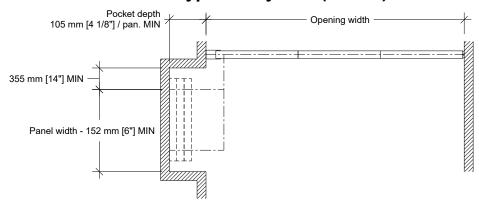

Remote Stack

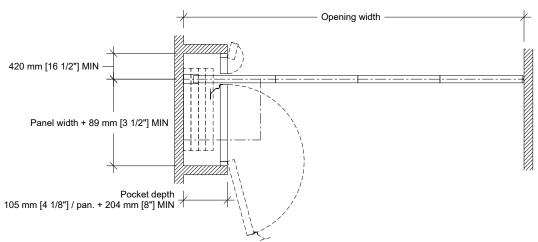

Pocket and PN-83 non-acoustical pocket door (partition seals to back of pocket)

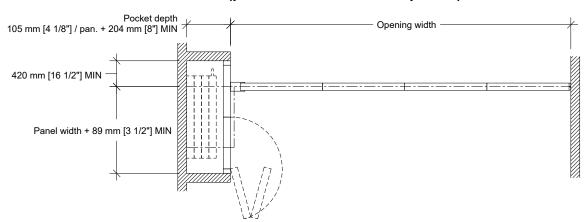

Pocket and PA-82B acoustical pocket door (partition seals to face of pocket door)