


Technical Data Sheet Excel 742

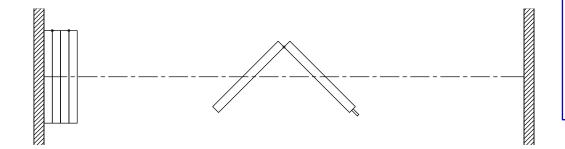

Features & Options

Standard Features

- Manually-operated paired-panel movable partition.
- STC 43, 48, 50, or 54.
- Steel faces laminated to gypsum board.
- 102 mm [4"] nominal thickness. 1230 mm [48 1/2"] maximum width.
- 18 ga. welded steel frame.
- Trimless vertical edges.
- Combination aluminum and vinyl tongue and groove vertical sound seals between panels.
- Final closure by telescopic jamb.
- Type FA horizontal seals :
 - Fixed top sweeps
 - Automatic retractable bottom seals set as panels are deployed
 - bottom seals provide a 50 mm [2"] floor clearance
- Steel butt hinges.

- Clear-anodized 6063-T6 alloy aluminum track.
- Each panel supported by one carrier made up of four vertically-aligned precision-ground hardened steel ball bearing wheels with nylon tires.
- Vinyl wallcovering.
- Maximum height: 4953 mm [16'-3"].

Optional Features and Accessories

- STC 43 with gypsum board faces.
- Protective trims on entire perimeter.
- Powder-coated frame and/or track.
- 11 ga. steel track, painted white.
- Upgraded wallcoverings : fabric, vertically-ribbed carpet, or full-height marker board.
- Owner-supplied wallcovering (approval required).
- Final closure by hinged closure panel.




Optional Features and Accessories (cont'd)

- ADA-compliant pass door with flush pulls and roller latch.
- Door options:
 - concealed automatic closer
 - window frame
 - door viewer
 - panic bar
 - panic bar with lockable lever
 - self-illuminated exit sign *
 - "green running man" self-illuminated exit sign *
 - deadbolt lock *

(* An exit sign and a deadbolt lock will not be installed together on the same door.)

- Surface-mounted white marker boards.
- Surface-mounted chalk boards.
- Surface-mounted natural cork tack boards.
- · Eraser boxes.
- · Acoustical or non-acoustical pocket door.


Horizontal Seals

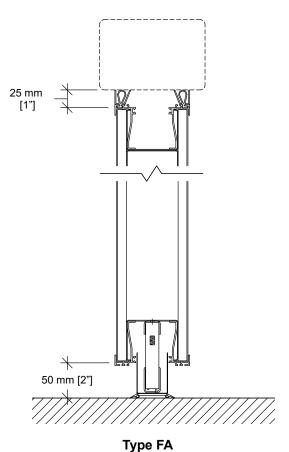

Floor clearance : 50 mm [2"]
Operating tolerances :
+0 mm / -38 mm [+0" / -1 1/2"]




Vertical Section

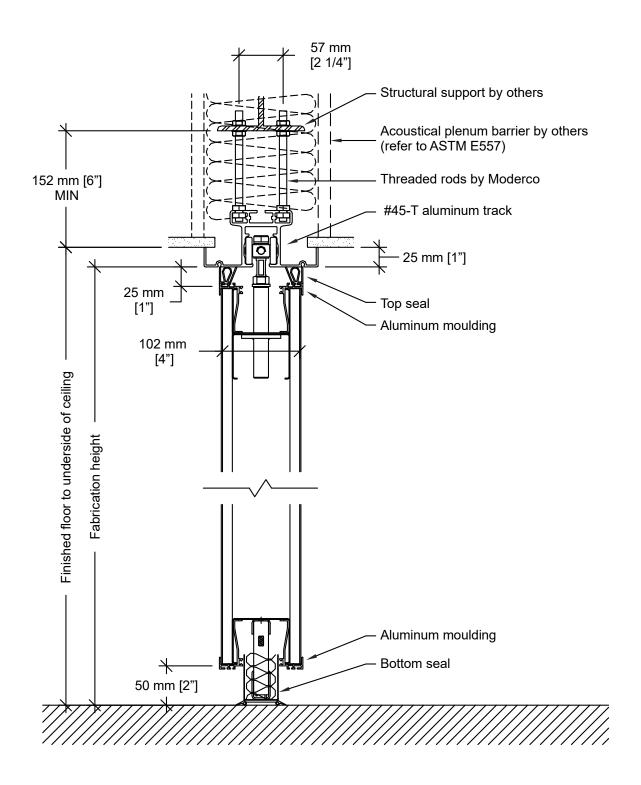



Track Options



#45-T track with optional hanger bracket


178 mm [7"] MIN
25 mm [1"]
25 mm [1"]

Optional #72 steel track with hanger bracket

6)

Hanger bracket required for installations where the topmost nuts cannot be used for adjustment.


Elevation

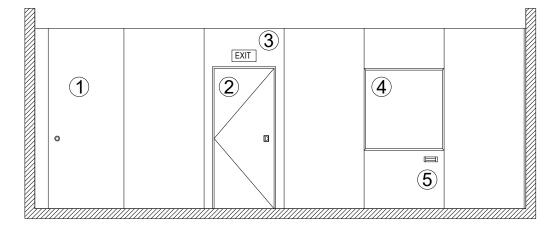


- I- Telescopic closure panel
- 2- Single pass door
- 3- Self-illuminated exit sign
- 4- Work surface
- 5- Eraser box
- 6- Hinged closure panel



Plan Views

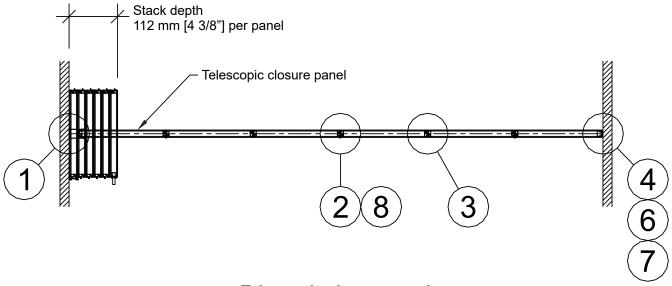


Telescopic closure panel

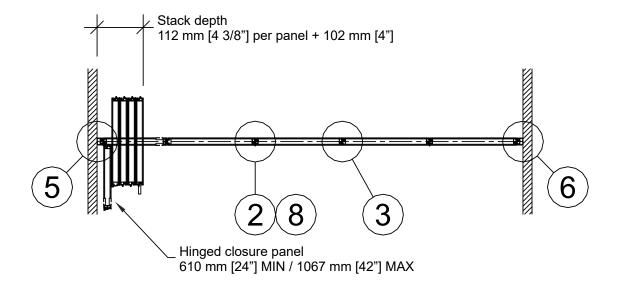


Hinged closure panel



Horizontal Sections

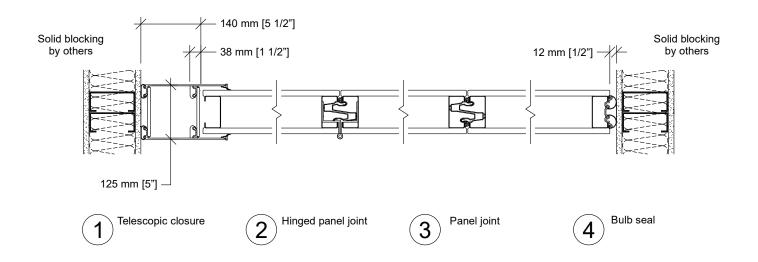

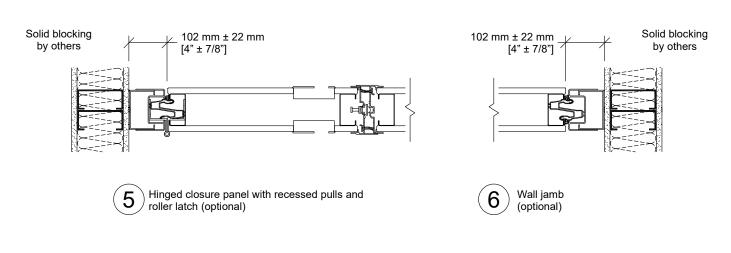





7 End cap (optional) Panel joint with protective trims (optional)




Typical Layouts

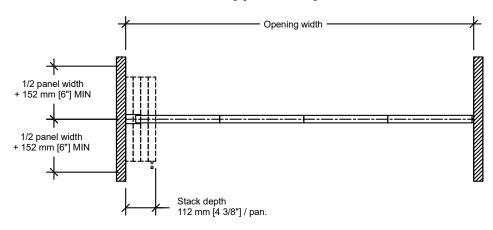

Wall to wall - telescopic closure

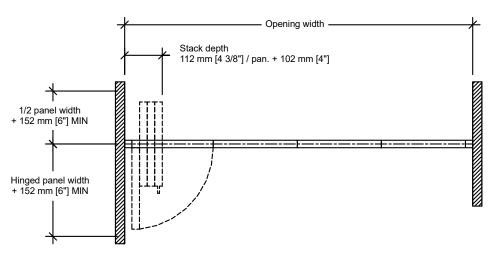


Wall to wall - hinged closure

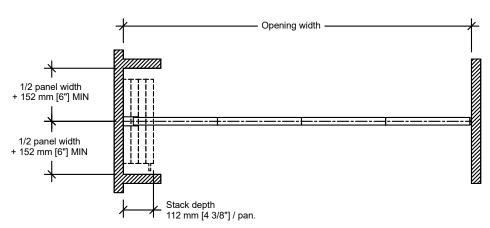


Pocket



Typical Layouts (cont'd)

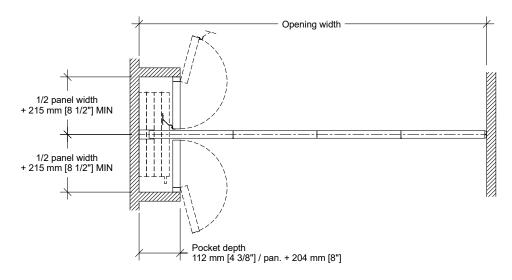

Pocket and PN-73 non-acoustical pocket door (partition seals to back of pocket)

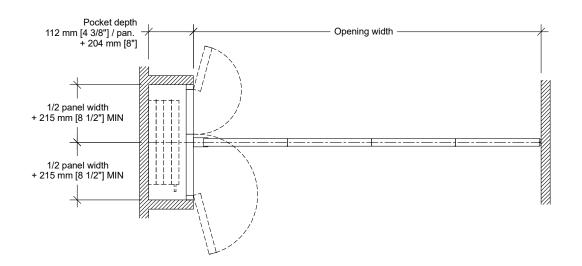

Pocket and PA-72 acoustical pocket door (partition seals to face of pocket door)