


Technical Data Sheet Signature 800 Double Pass Doors




- Same core construction as movable partition panels
- Same surface finish as movable partition / optional custom finish / unfinished
- Low profile hinges
- Flush pulls and roller latch
- 2553 mm [8'-4 1/2""] underside of track MIN for 2134 mm [7'-0"] door
- 2452 mm [8'-0 1/2""] underside of track MIN for 2032 mm [6'-8"] door

- 1- Sweep seals
- 2- Flush pull
- 3- Retractable seal activator
- 4- Manually-activated bottom seals
- 5- Sweep seals

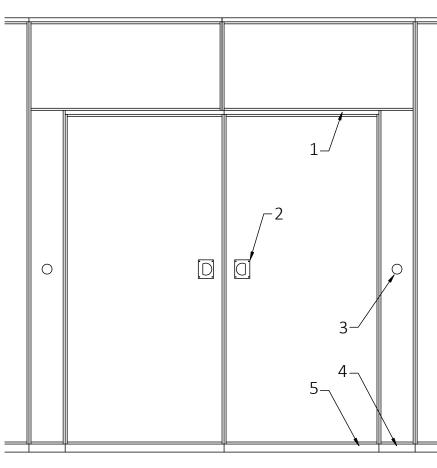



Horizontal Section

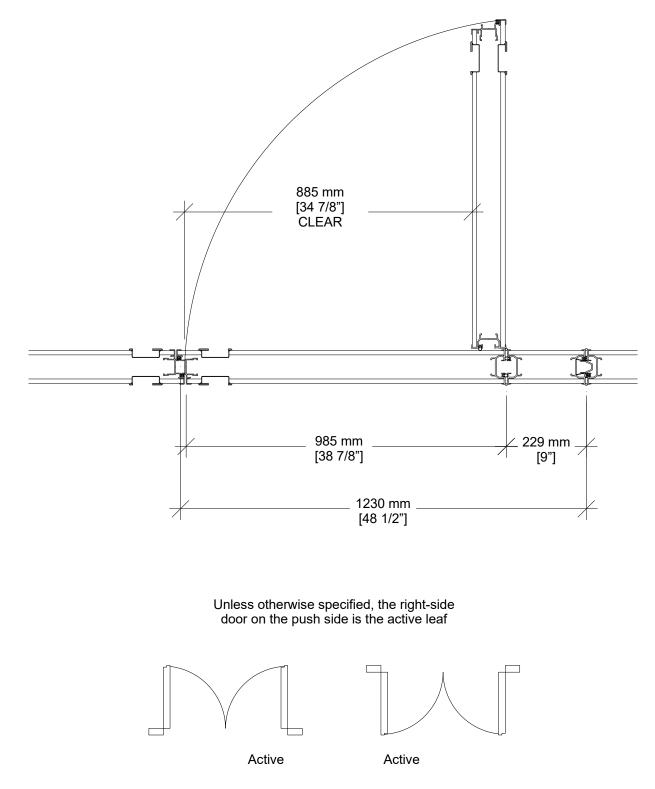




Optional Hardware

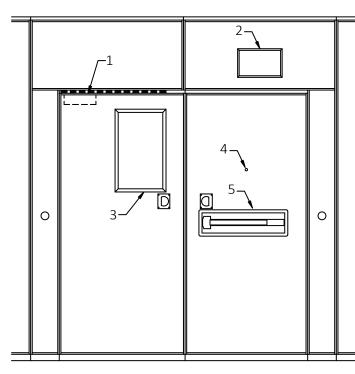

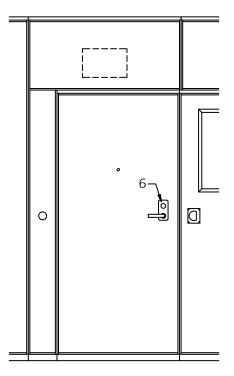

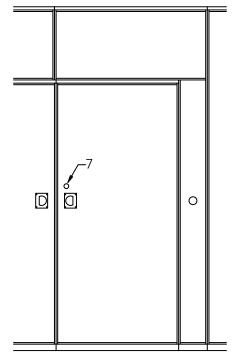

1- Concealed door closer

2- Exit sign. 1

- Self-luminous "Running Man" exit sign with green faceplate (standard outside USA, optional in USA)
- Photoluminescent "EXIT" sign with red faceplate (standard in USA, optional elsewhere)
- Photoluminescent "EXIT" sign with green faceplate (optional)
- Self-luminous "EXIT" sign with red faceplate (optional)
- Self-luminous "EXIT" sign with green faceplate (optional)

3- Window frame

- 355 mm X 610 mm [14" X 24"] - Glazing by others
- 4- Door viewer
- 5- Panic bar 1/2
- 6- Panic bar lever (with optional lock)
- 7- Deadbolt lock ³
- ¹ Exit sign and panic bar available on active leaf only
- ² Add 150 mm [6"] to stack depth for each panic bar
- ³ Not available with panic bar or exit sign