




## Technical Data Sheet Signature 841

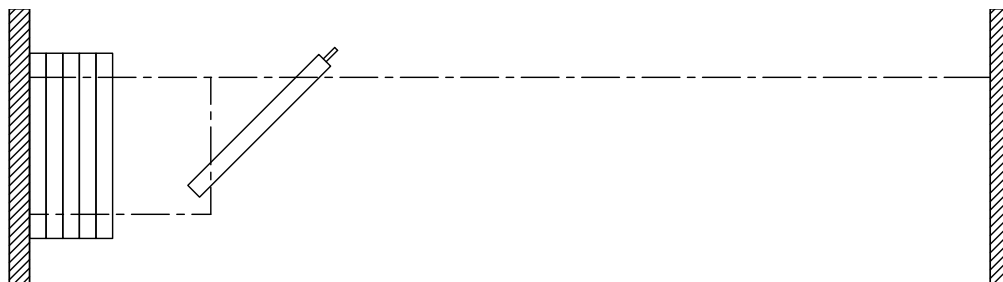

### Features & Options

#### Standard Features

- Manually-operated individual-panel movable partition.
- STC 43 or 47 with gypsum board faces.
- STC 49, 52, 53, or 55 with steel faces laminated to gypsum board.
- 102 mm [4"] nominal thickness. 1230 mm [48 1/2"] maximum width.
- Clear-anodized steel-reinforced aluminum frame.
- Protective trims on entire perimeter.
- Combination aluminum and vinyl tongue and groove vertical sound seals between panels.
- Final closure by telescopic jamb.
- Type FA horizontal seals:
  - Fixed top sweeps
  - Automatic retractable bottom seals set as panels are deployed
  - bottom seals provide a 50 mm [2"] floor clearance
  - last panel fitted with fixed bottom sweeps
- (STC 53) Type MM-1 horizontal seals:
  - top and bottom retractable seals
  - Manually-operated, simultaneously-activated top and bottom seals
  - bottom seals provide a 25 mm [1"] floor clearance

- (STC 55) Type MM-1 horizontal seals with fixed top sweeps:
  - top and bottom retractable seals
  - Manually-operated, simultaneously-activated top and bottom seals
  - bottom seals provide a 25 mm [1"] floor clearance
  - additional fixed top sweeps
- Clear-anodized 6063-T6 alloy aluminum track.
- Each panel supported by two carriers made up of two horizontally-aligned precision-ground hardened steel ball bearing wheels with nylon tires.
- Vinyl wallcovering.
- Maximum height: 10135 mm [33'-3"].

#### Optional Features and Accessories

- STC 49, 52, 53, or 55 with gypsum board faces and steel backing.
- Trimless vertical edges (STC 49 and over).
- Powder-coated frame and/or track.
- 11 ga. steel track, painted white.
- Upgraded wallcoverings : fabric, vertically-ribbed carpet, plastic laminate, full-height marker board, wood veneer, custom finishes.

### Optional Features and Accessories (cont'd)


- Owner-supplied wallcovering (approval required).
- Final closure by hinged closure panel.
- (STC 43 to 52) Type FM horizontal seals:
  - Fixed top sweeps
  - Manually-operated bottom seals
  - bottom seals provide a floor clearance of 25 mm [1"], 38 mm [1 1/2"], 50 mm [2"], 64 mm [2 1/2"], or 102 mm [4"]
- (STC 43 to 52) Type MM horizontal seals:
  - top and bottom retractable seals
  - Manually-operated, simultaneously-activated top and bottom seals
  - bottom seals provide a floor clearance of 25 mm [1"], 38 mm [1 1/2"], 50 mm [2"], 64 mm [2 1/2"], or 102 mm [4"]
- (STC 43 to 52) Type AA horizontal seals:
  - top and bottom retractable seals
  - simultaneously-activated Automatic top and bottom seals
  - bottom seals provide a floor clearance of 38 mm [1 1/2"]
  - simultaneous operation of telescopic closure and seals of last panel (also available on partitions with type MM-1.5 horizontal seals)
- ADA-compliant pass door with flush pulls and roller latch.
- Door options:
  - concealed automatic closer
  - window frame
  - door viewer
  - panic bar
  - panic bar with lockable lever
  - self-luminous "Running Man" exit sign with green faceplate (standard outside USA, optional in USA) \*
  - photoluminescent "EXIT" sign with red faceplate (standard in USA, optional elsewhere) \*
  - photoluminescent "EXIT" sign with green faceplate (optional) \*
  - self-luminous "EXIT" sign with red faceplate (optional) \*
  - self-luminous "EXIT" sign with green faceplate (optional) \*
  - deadbolt lock \*

\* An exit sign and a deadbolt lock will not be installed together on the same door.

### Optional Features and Accessories (cont'd)

- Inset white marker boards / chalk boards / natural cork tack boards.
- Eraser boxes / chalk trays
- Acoustical or non-acoustical pocket door.
- UL/ULC-listed 1 hour fire-rating,
  - STC 53
  - Trimless vertical edges


### **Horizontal Seals**

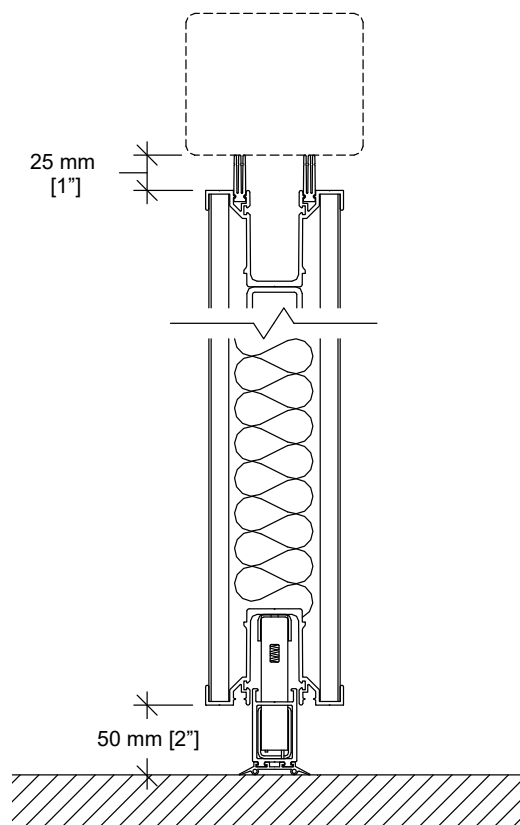

#### **Type FA**

Floor clearance : 50 mm [2"]  
 Operating tolerances :  
 +0 mm / -38 mm [+0" / -1 1/2"]

## Horizontal Seals (cont'd)

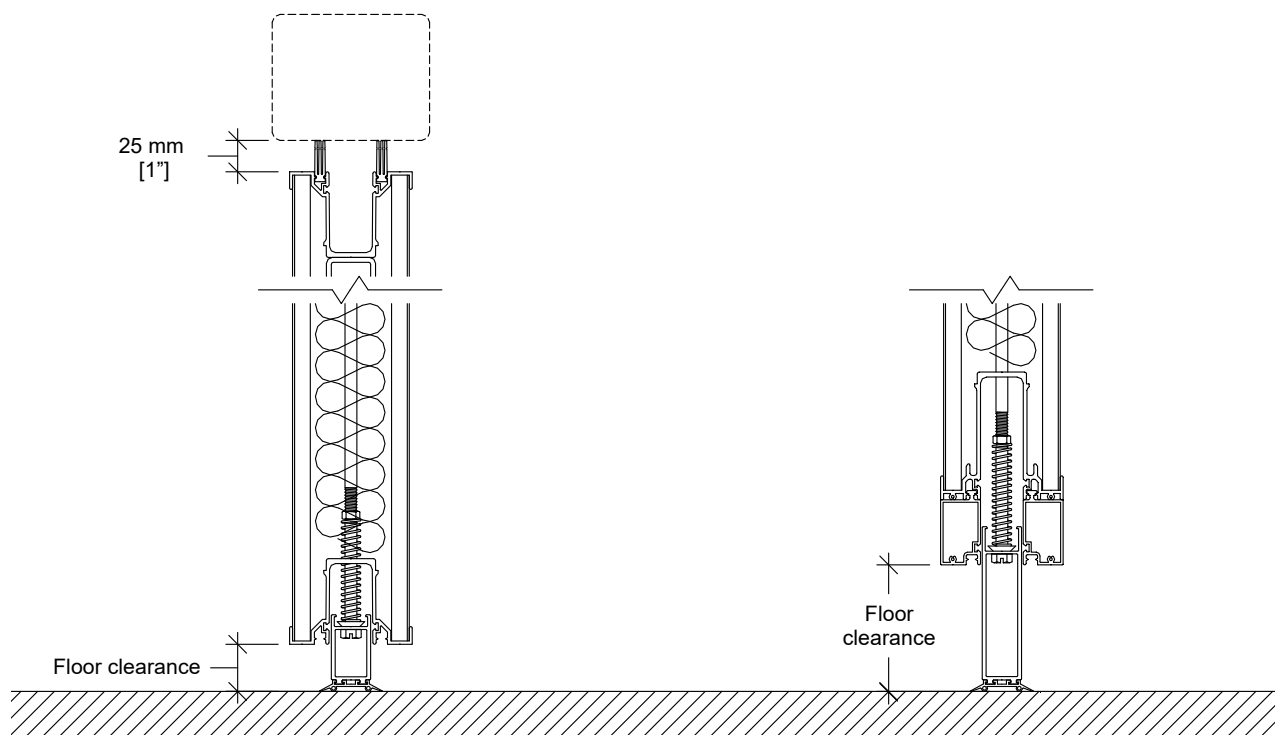

### Type FM-1

Floor clearance : 25 mm [1"]

Operating tolerances :

+0 mm / -15 mm [+0" / -5/8"]

### Type FM-1.5

Floor clearance : 38 mm [1 1/2"]

Operating tolerances :

+0 mm / -19 mm [+0" / -3/4"]

### Type FM-2

Floor clearance : 50 mm [2"]

Operating tolerances :

+0 mm / -25 mm [+0" / -1"]

### Type FM-2.5

Floor clearance : 64 mm [2 1/2"]

Operating tolerances :

+0 mm / -38 mm [+0" / -1 1/2"]


### Type FM-4

Floor clearance : 102 mm [4"]

Operating tolerances :

+0 mm / -64 mm [+0" / -2 1/2"]

## Horizontal Seals (cont'd)

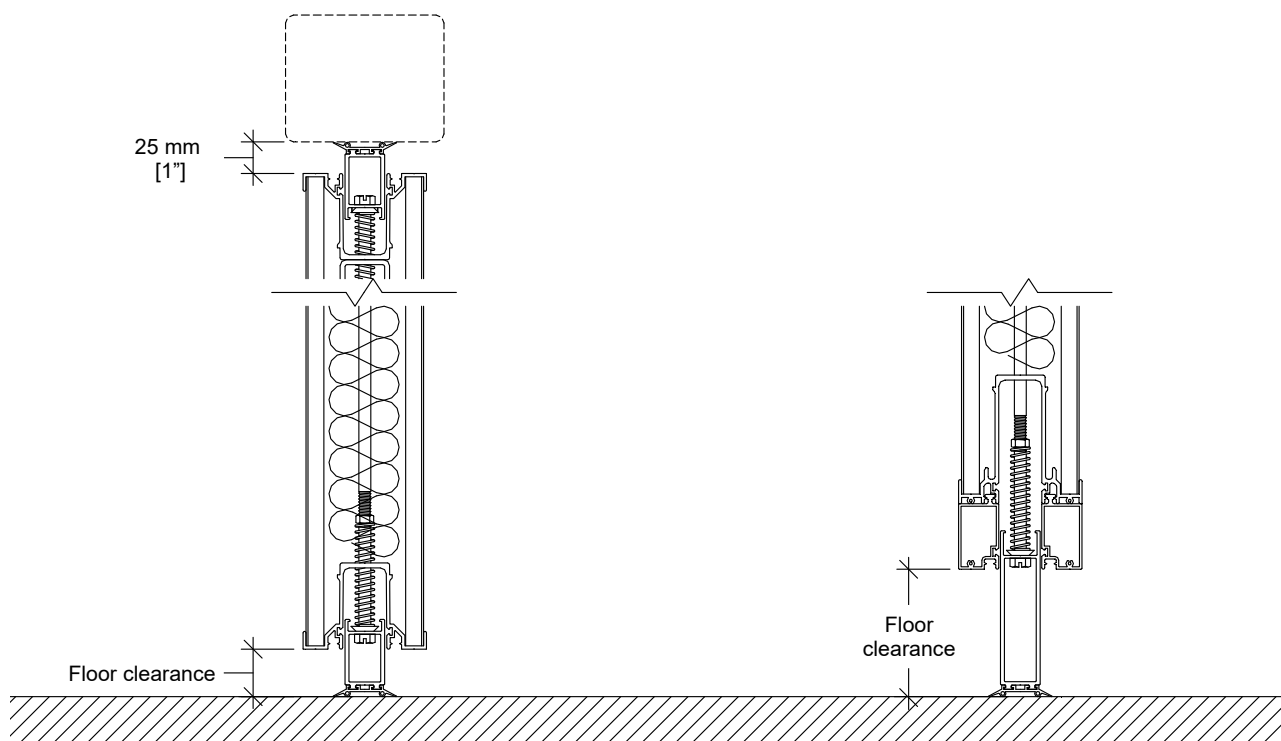

### Type MM-1

Floor clearance : 25 mm [1"]

Operating tolerances :

+0 mm / -15 mm [+0" / -5/8"]

### Type MM-1.5

Floor clearance : 38 mm [1 1/2"]

Operating tolerances :

+0 mm / -19 mm [+0" / -3/4"]

### Type MM-2

Floor clearance : 50 mm [2"]

Operating tolerances :

+0 mm / -25 mm [+0" / -1"]

### Type MM-2.5

Floor clearance : 64 mm [2 1/2"]

Operating tolerances :

+0 mm / -38 mm [+0" / -1 1/2"]


### Type MM-4

Floor clearance : 102 mm [4"]


Operating tolerances :

+0 mm / -64 mm [+0" / -2 1/2"]

## Horizontal Seals (cont'd)

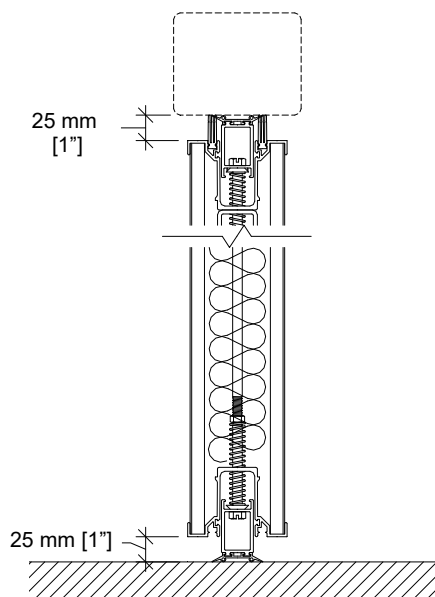


**Type MM-1 with fixed top sweeps**  
(STC 55 only)  
Floor clearance : 25 mm [1"]  
Operating tolerances :  
+0 mm / -15 mm [+0" / -5/8"]

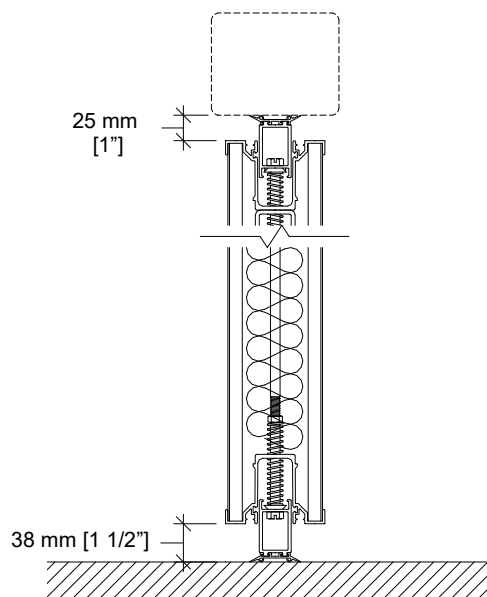


**Type AA**  
Floor clearance : 38 mm [1 1/2"]  
Operating tolerances :  
+0 mm / -19 mm [+0" / -3/4"]

## Elevation

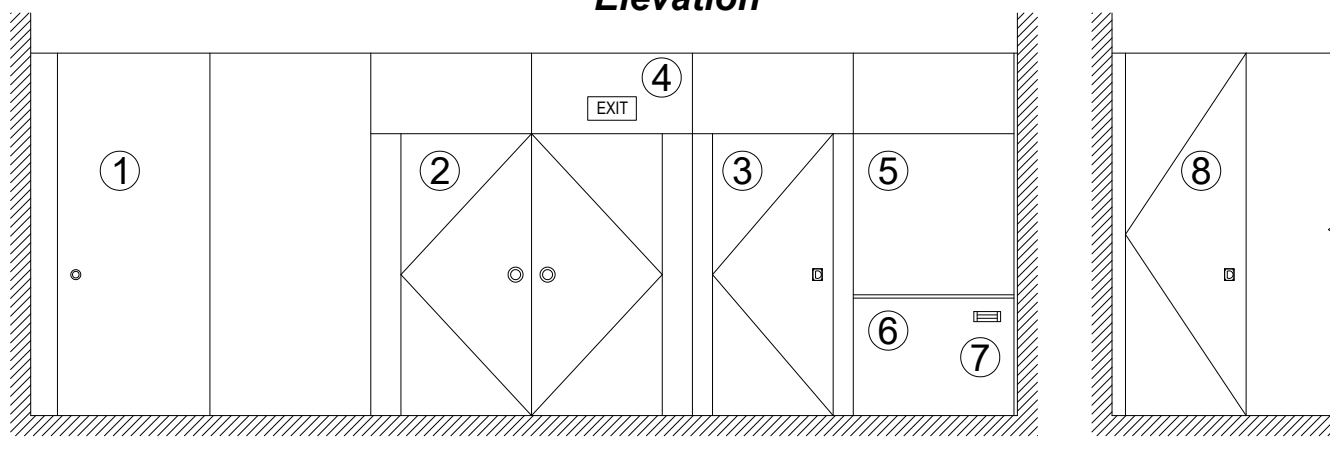


- |                               |                         |
|-------------------------------|-------------------------|
| 1- Telescopic closure panel   | 5- Work surface         |
| 2- Double pass doors          | 6- Chalk tray           |
| 3- Single pass door           | 7- Eraser box           |
| 4- Self-illuminated exit sign | 8- Hinged closure panel |

## Vertical Section

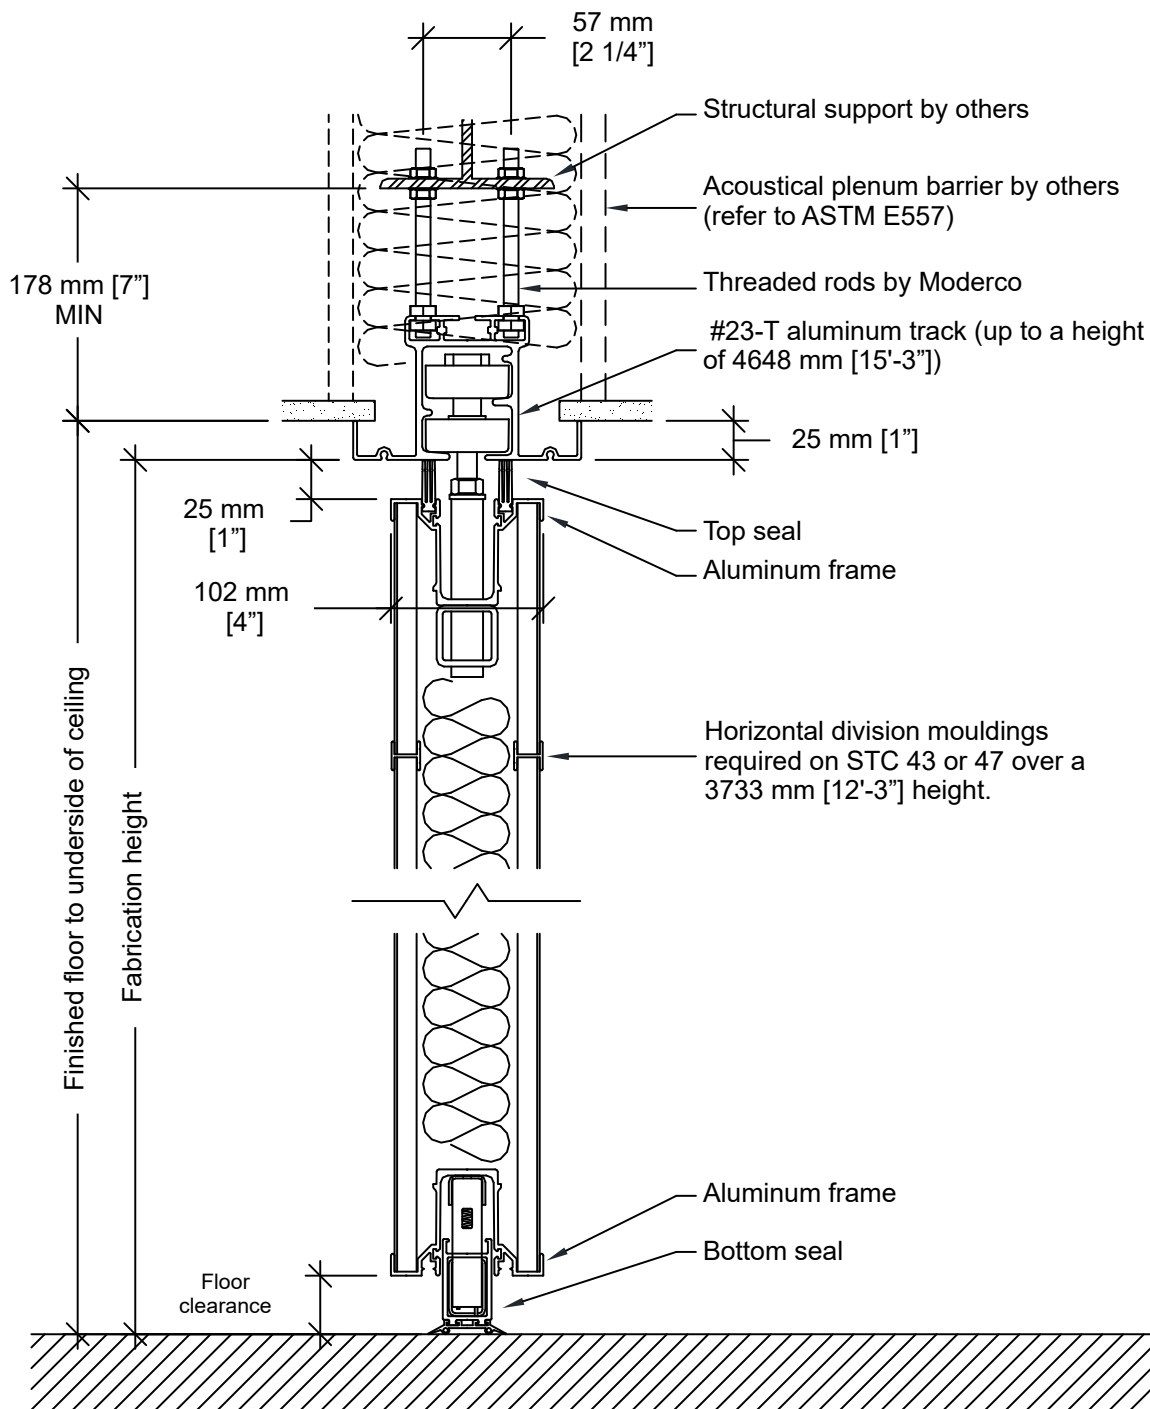


## Track Options

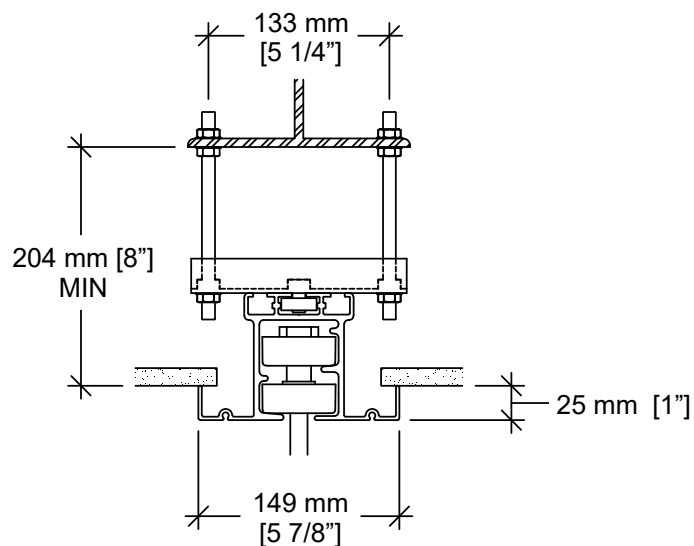

**#23-T track with optional hanger bracket**


Hanger bracket required for installations where the topmost nuts cannot be used for adjustment.

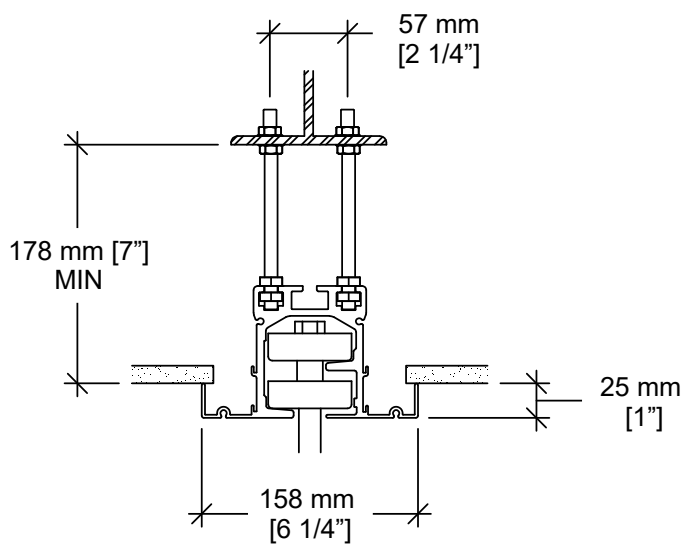

**#33-T aluminum track**


Standard for partitions from a height of 4648 mm [15'-3\"] up to 6780 mm [22'-3\"].

Optional for partitions up to 4648 mm [15'-3\"].

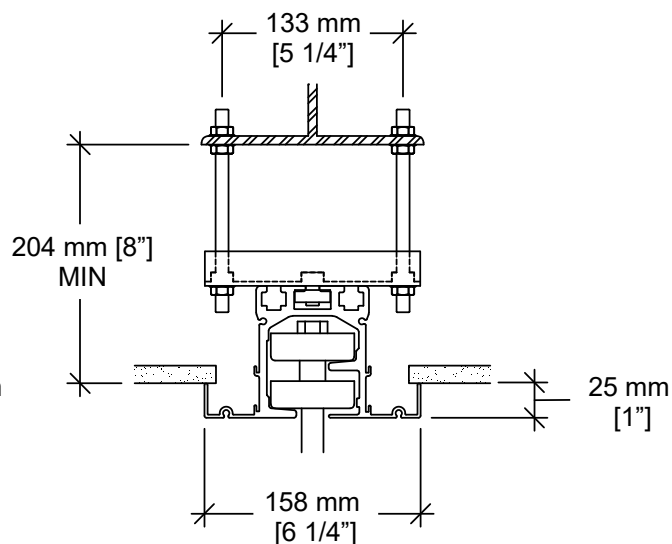

**#33-T aluminum track with optional hanger bracket**


## Track Options (cont'd)

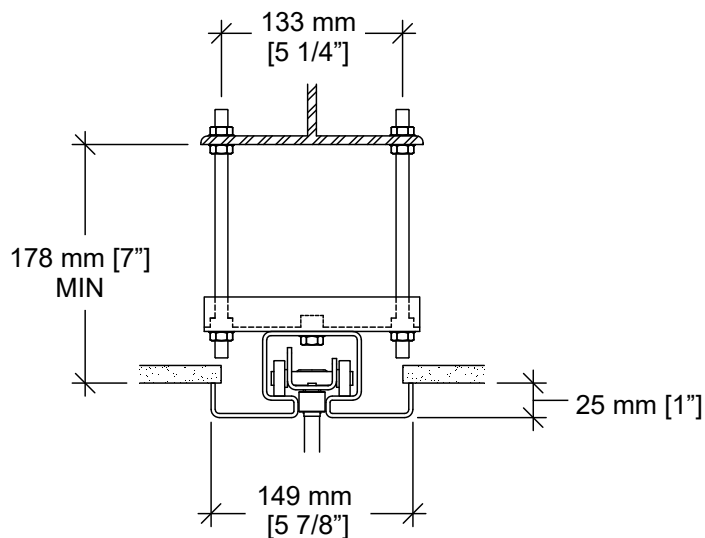

**#72 steel track with hanger bracket**

Optional for partitions up to 4648 mm [15'-3"].

Programmable switches.

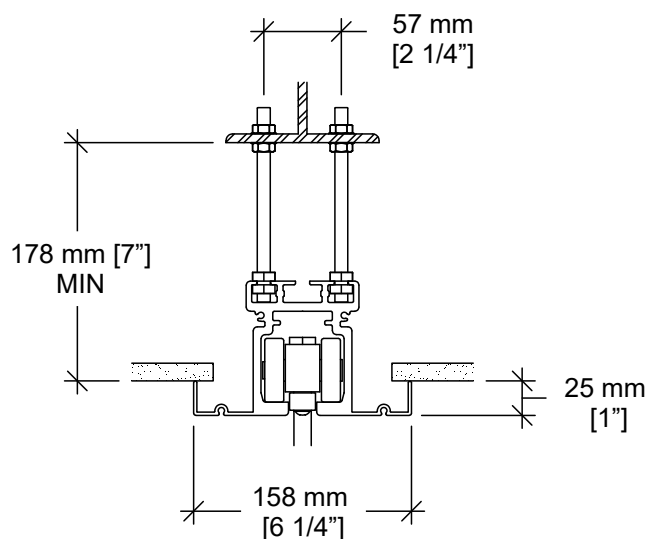


**#55-T aluminum track**

Standard for partitions from a height of 6780 mm [22'-3"] up to 10135 mm [33'-3"].


Optional for partitions up to 6780 mm [22'-3"].

Programmable switches.

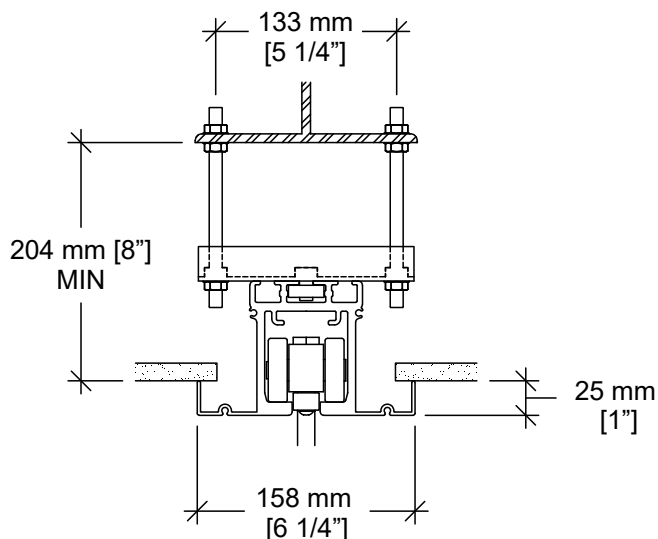


**#55-T aluminum track  
with optional hanger bracket**

## Plan Views

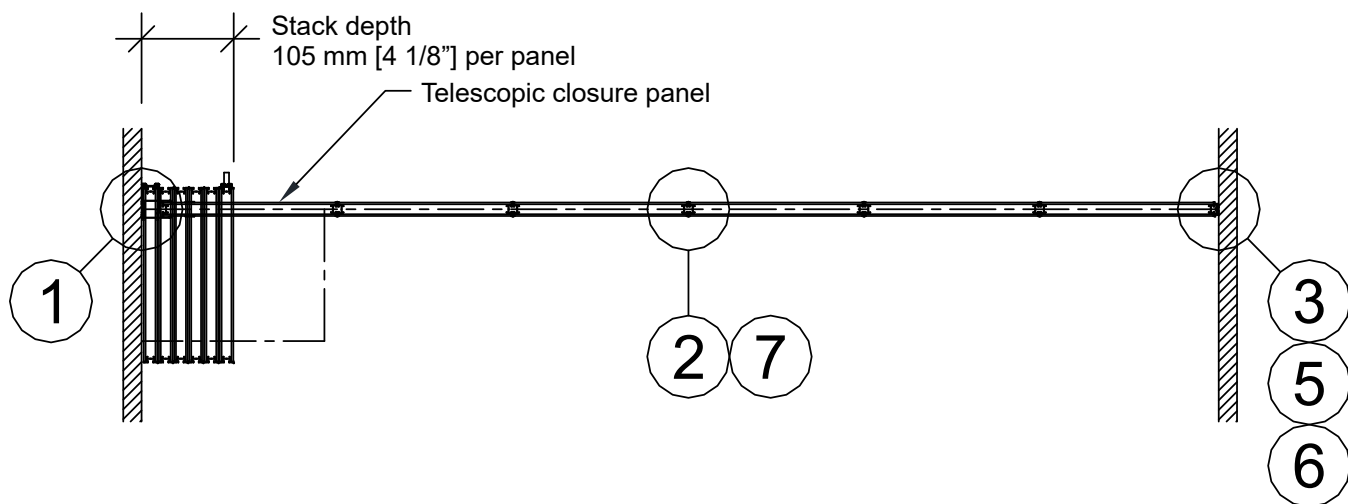


### Telescopic closure panel

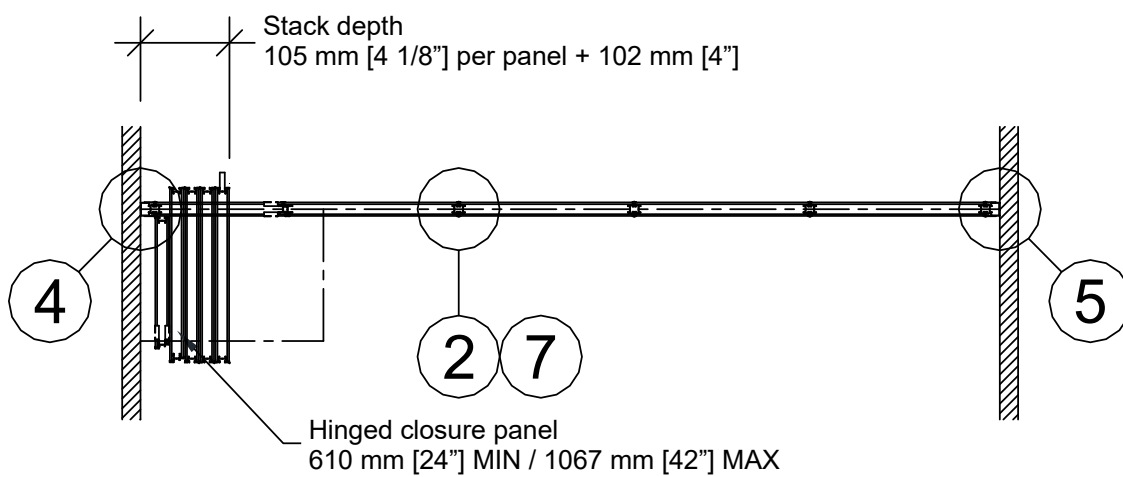

### Hinged closure panel


## Horizontal Sections

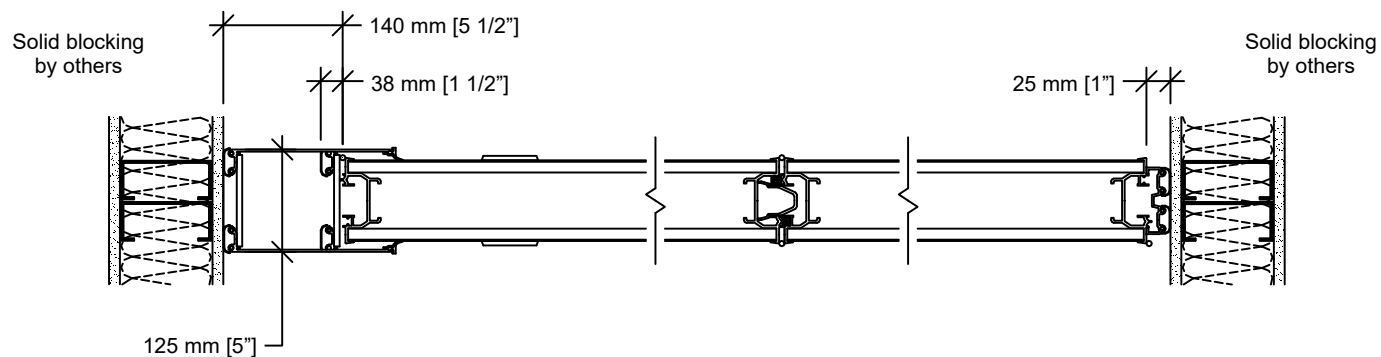

① Telescopic closure


② Panel joint

③ Bulb seal

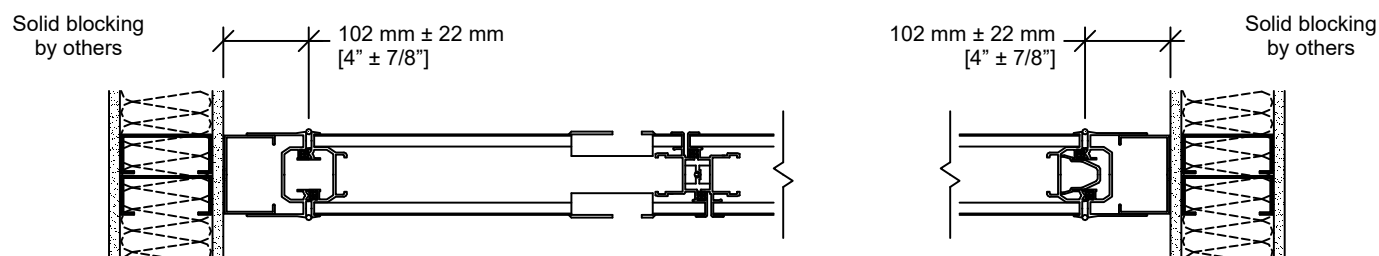


④ Hinged closure panel with recessed pulls and roller latch (optional)

⑤ Wall jamb (optional)




⑥ End cap (optional)




⑦ Panel joint with trimless vertical edges (optional) (STC 49 and over)


## Typical Layouts - #23-T & #33-T Tracks

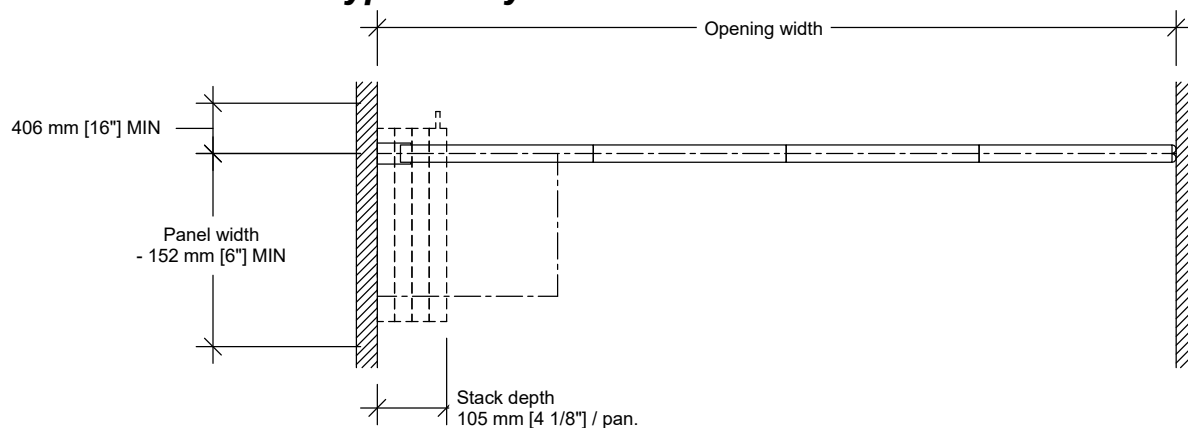

### Wall to wall Side Stack – telescopic closure

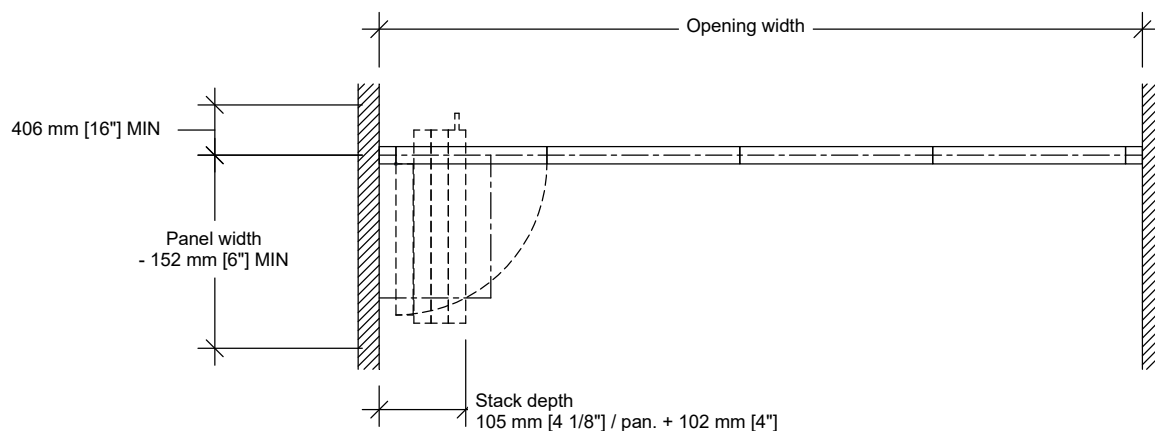


### Wall to wall Side Stack – hinged closure

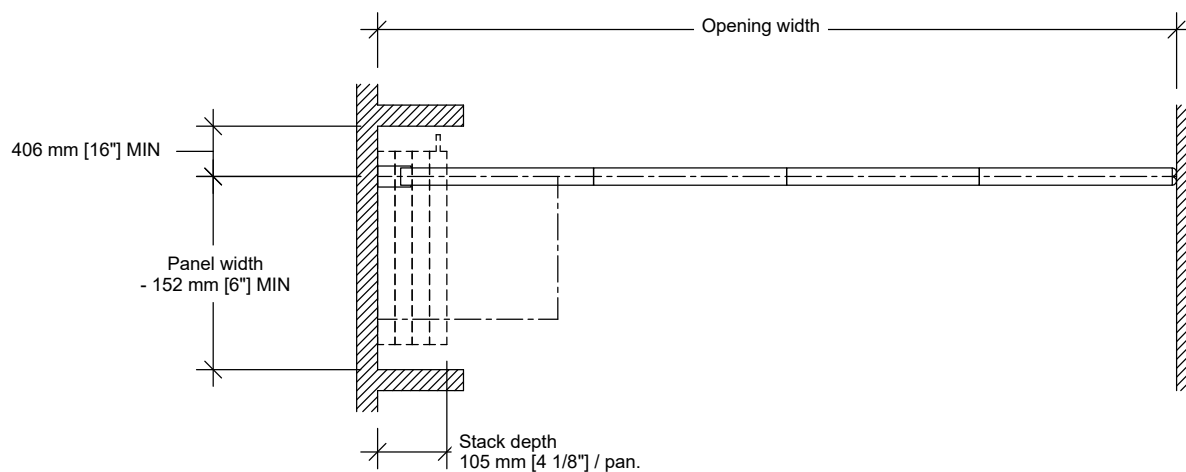


### Pocket


## Typical Layouts - #23-T & #33-T Tracks (cont'd)

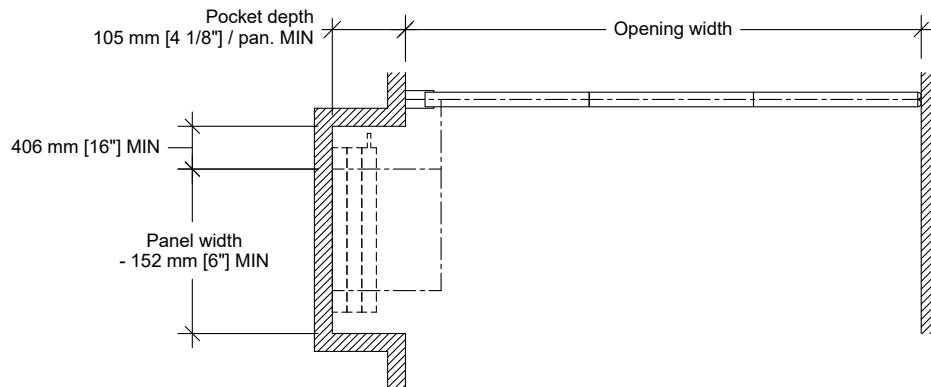

### Remote Stack

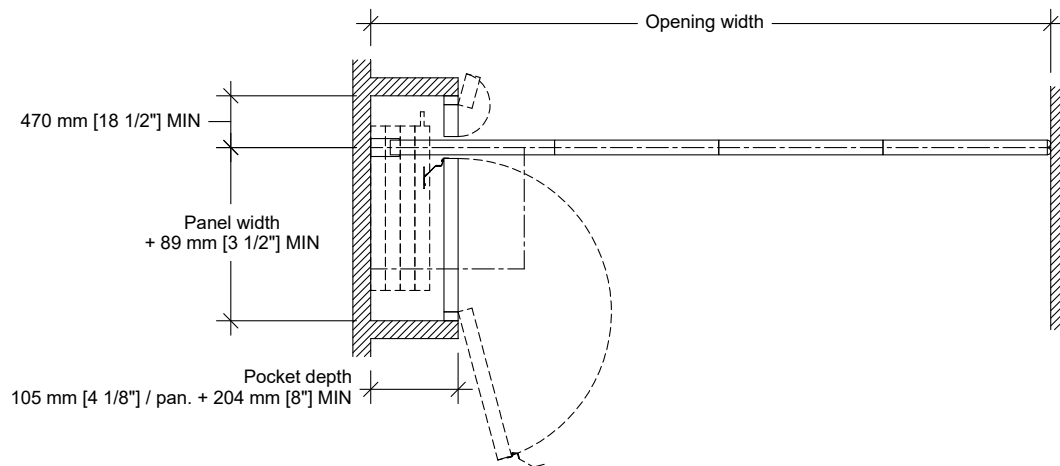


### Pocket and PN-83 non-acoustical pocket door (partition seals to back of pocket)

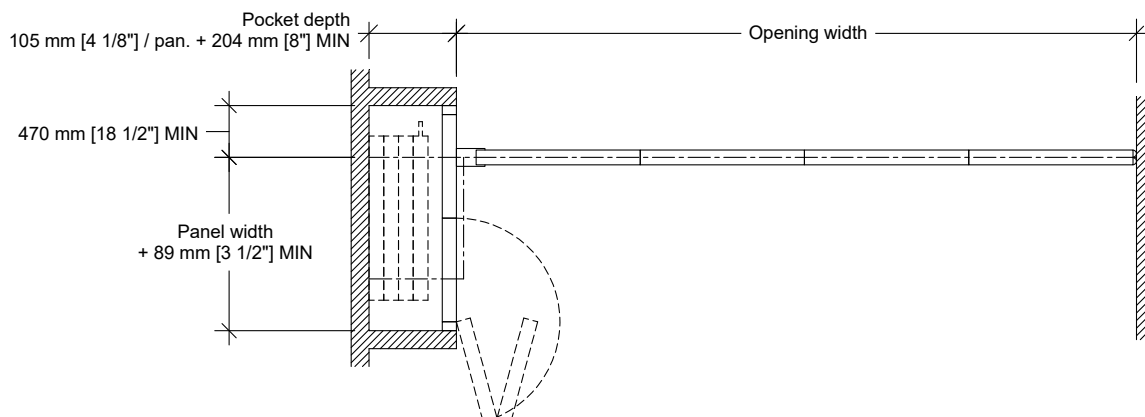


### Pocket and PA-82B acoustical pocket door (partition seals to face of pocket door)


## Typical Layouts - #72 & #55-T Tracks

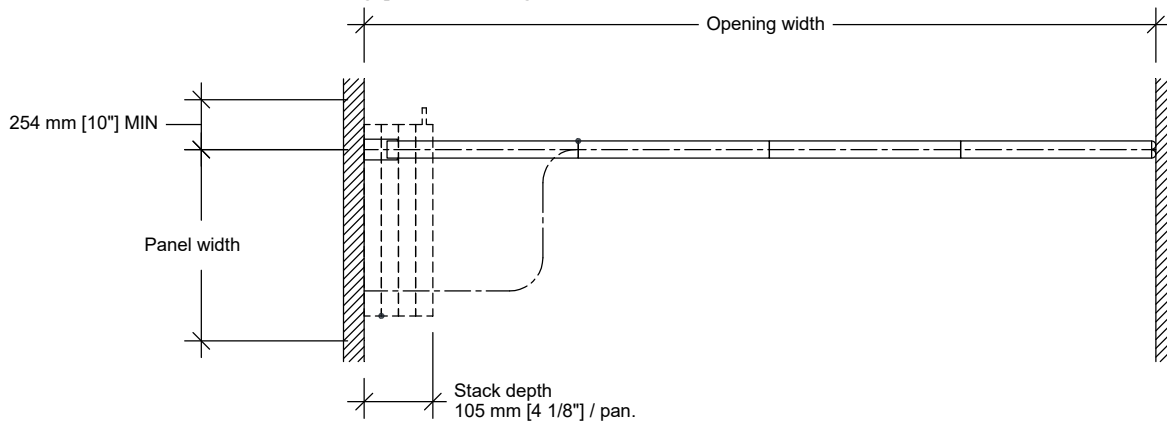

### Side Stack – bi-folding telescopic closure

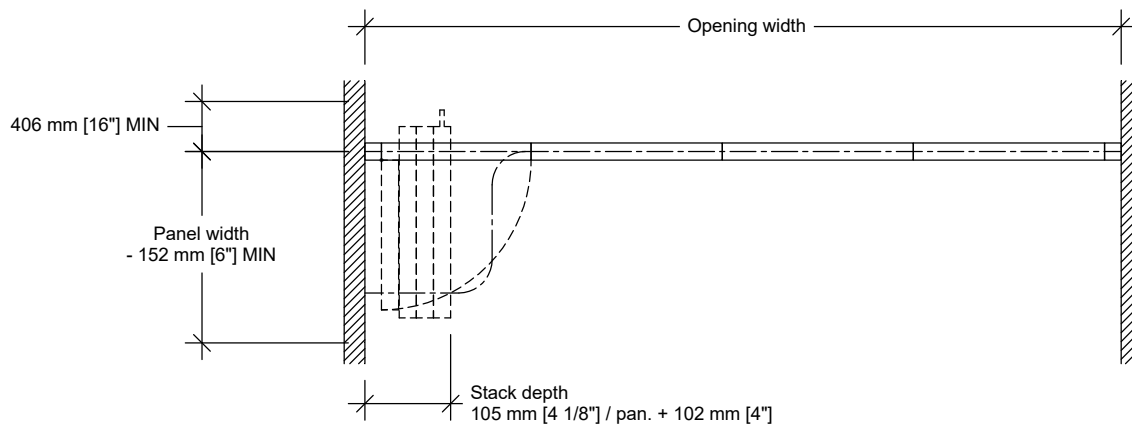


### Side Stack – hinged closure (7 panels max)

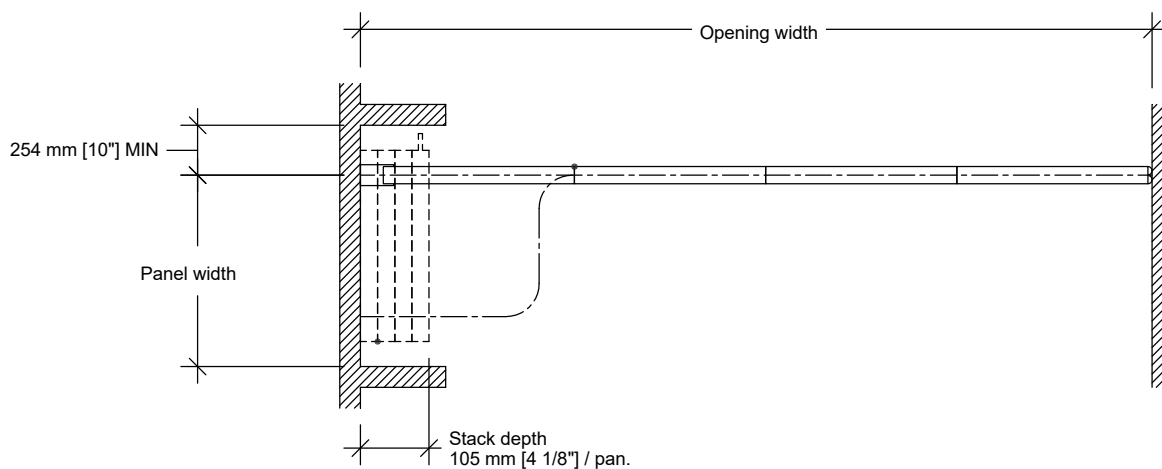


### Pocket


## Typical Layouts - #72 & #55-T Tracks (cont'd)

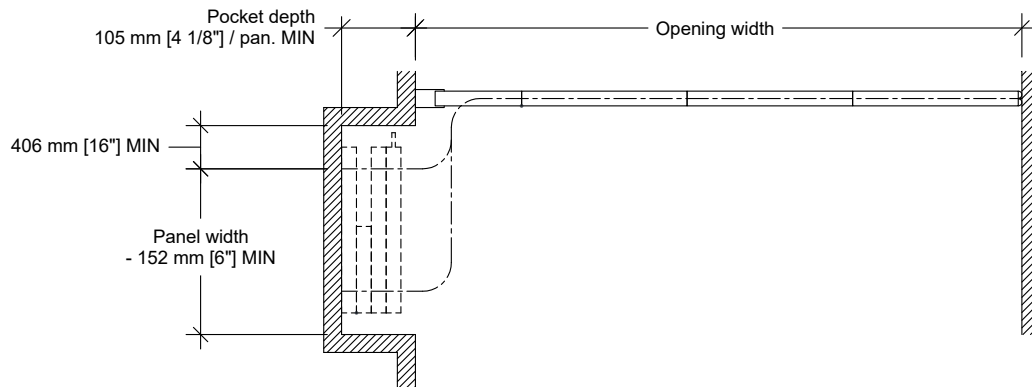

### Remote Stack

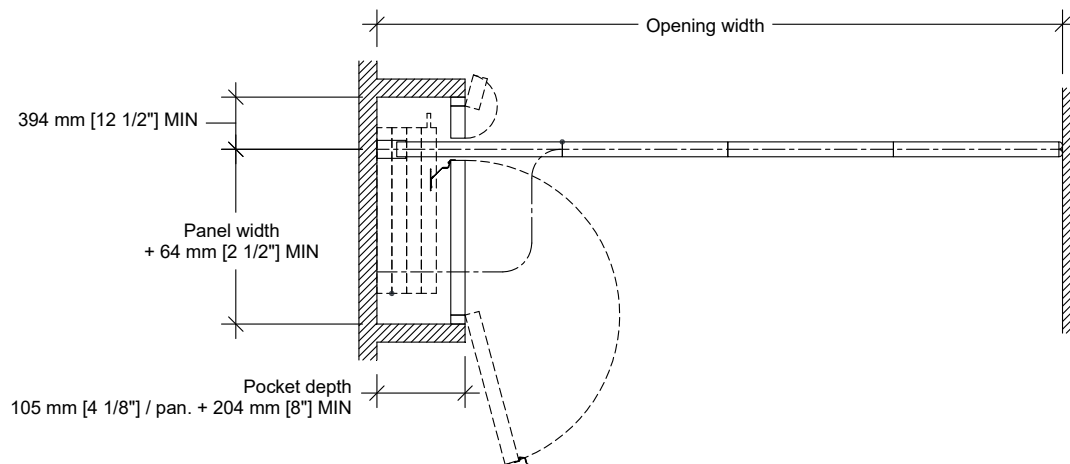

### Pocket and PN-83 non-acoustical pocket door (partition seals to back of pocket)

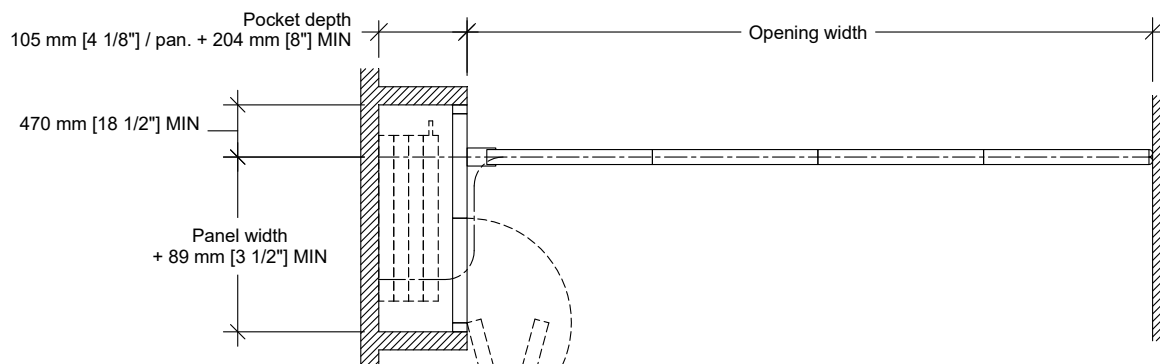

### Pocket and PA-82B acoustical pocket door (partition seals to face of pocket door)