


Technical Data Sheet Vision 121

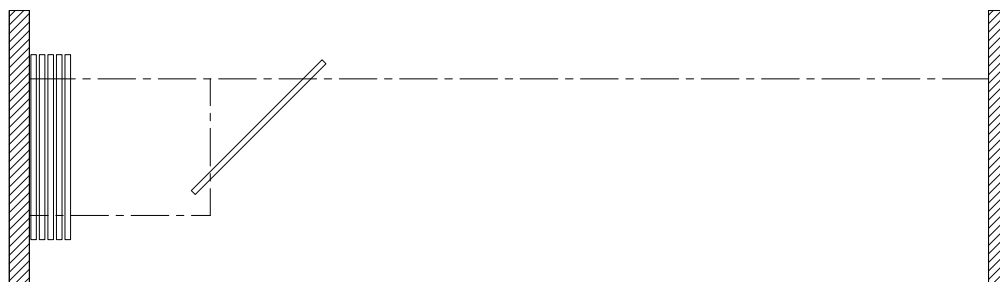

Features & Options

Standard Features


- Manually-operated individual-panel glass movable partition.
- 35 mm [1 3/8"] nominal thickness. Up to 1220 mm [48"] width.
- Clear 12 mm [1/2"] tempered glass faces with polished vertical edges.
- Clear anodized aluminum horizontal mouldings with brush seals.
- Each panel fitted with a foot bolt to stabilize the partition.
- Clear anodized 6063-T6 alloy aluminum track.
- Each panel supported by two dual horizontal wheel carriers with nylon tires over hardened precision ground steel ball bearing wheels.
- Maximum height : 3658 mm [12'-0"].

Optional Features and Accessories


- Powder-coated horizontal mouldings and/or track.
- Glass finishes : stained, colored, acid washed, frosted, etc.

- 11 ga. steel track with programmable switches, painted white.
- Floor bolt lock, one side.
- Deadbolt floor lock with
 - thumb turn cylinder, one side;
 - keyed and thumb turn cylinders;
 - keyed cylinder, one side;
 - keyed cylinders, both sides.
- Final closure by 305 mm [12"] pivot panel.
- Final closure by 305 mm [12"] flap panel.
- Final closure by ADA-compliant pivot door. Optional pivot door hardware:
 - Floor-concealed door closer.
 - Lockable latch keyed on one side with thumb turn on other side.
 - Deadbolt floor lock with:
 - thumb turn cylinder, one side;
 - keyed and thumb turn cylinders;
 - keyed cylinder, one side;
 - keyed cylinders, both sides.
 - Panic bar (with lockable lever on opposite side).
 - Architectural pulls with magnetic floor latch.
- Full-height pass through door. Optional door hardware:
 - Lockable latch keyed on one side with thumb turn on other side.
 - Self-closing hydraulic hinges

Vertical Section

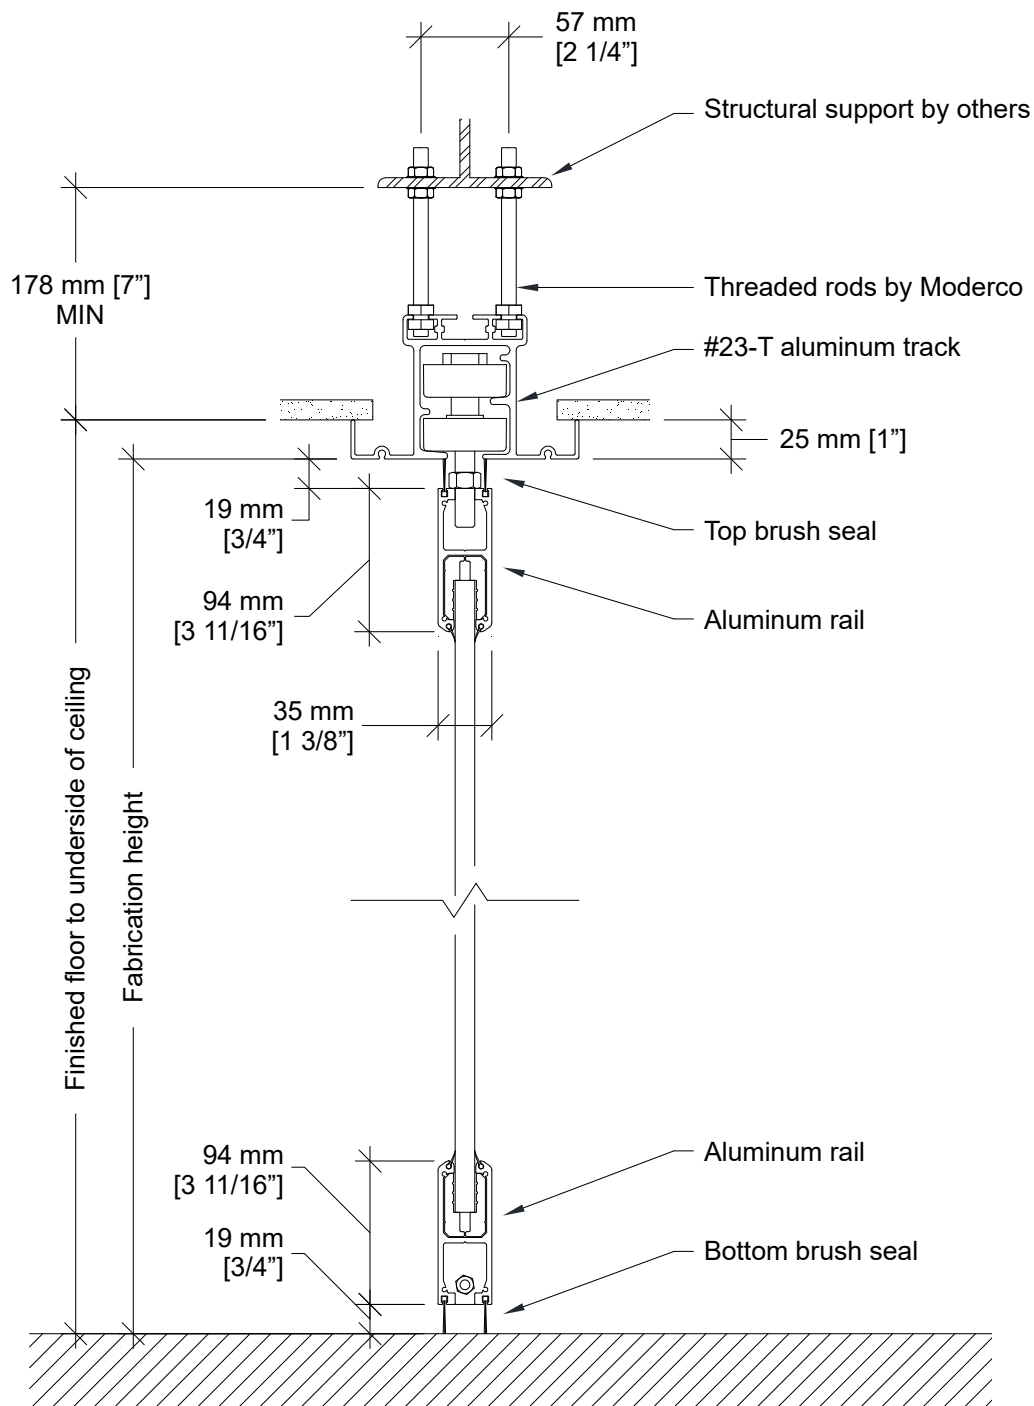


Track Options

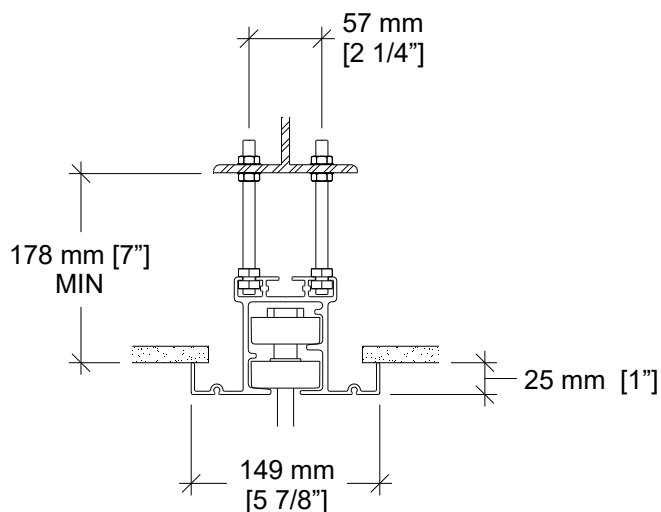


#23-T aluminum track

Standard track.

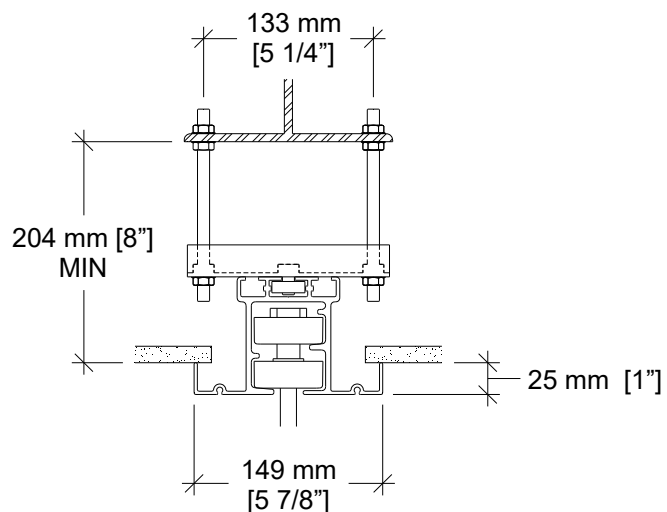

#23-T aluminum track with optional hanger bracket

Hanger bracket required for installations where the topmost nuts cannot be used for adjustment.

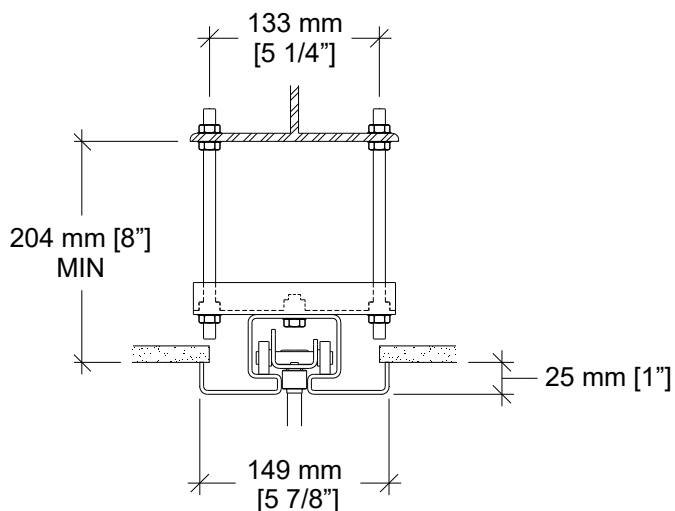


#72 steel track with hanger bracket

Optional track with programmable switches.


Requires pivot door.

Elevations

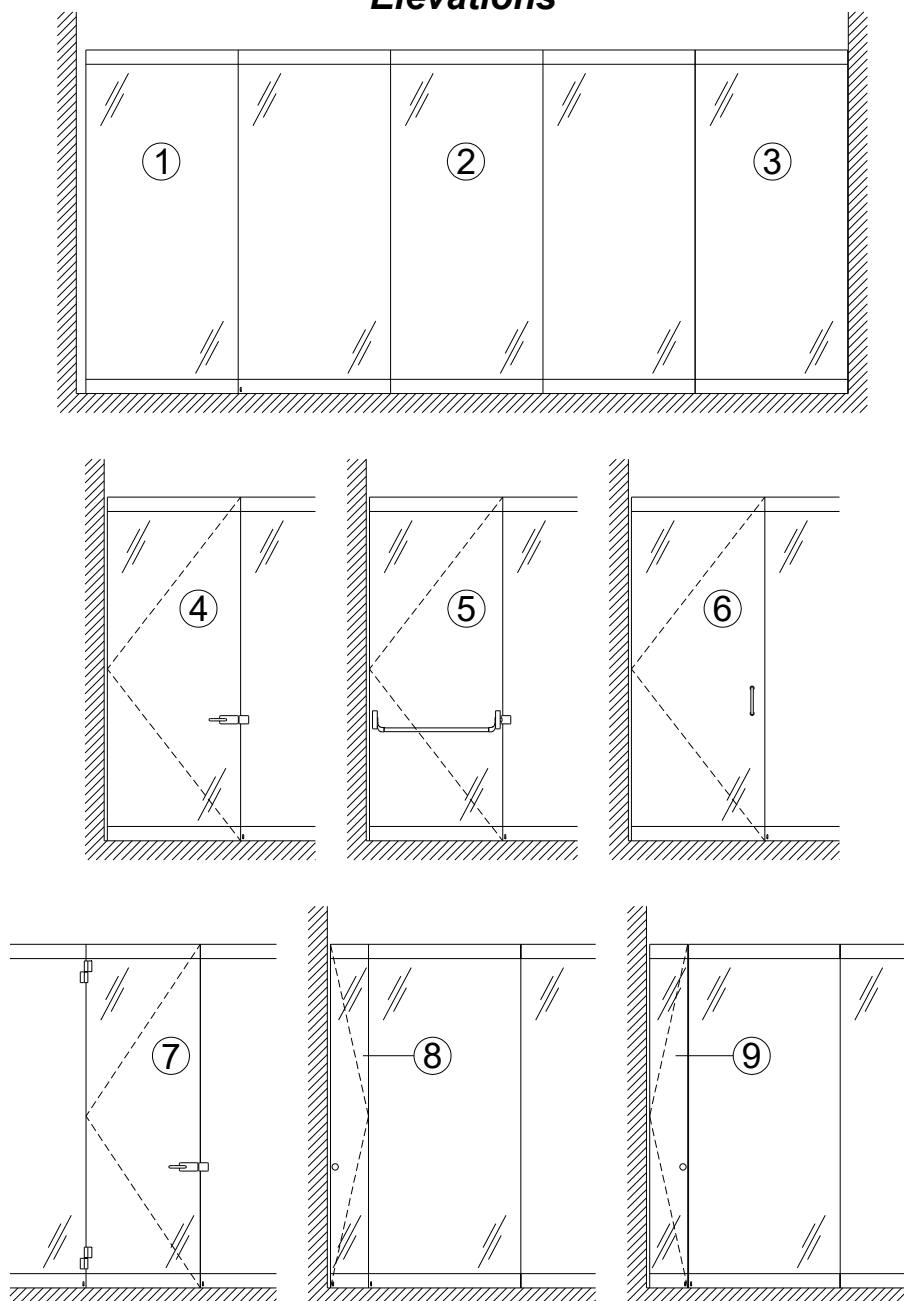


- | | |
|---|---|
| 1- Trail panel | 6- Optional Pivot door with architectural pulls |
| 2- Intermediate panel | 7- Optional Full-height door |
| 3- Lead panel | 8- Optional Flap closure panel |
| 4- Optional Pivot door | 9- Optional Pivot closure panel |
| 5- Optional Pivot door with panic bar (and lockable lever on opposite side) | |

Plan Views

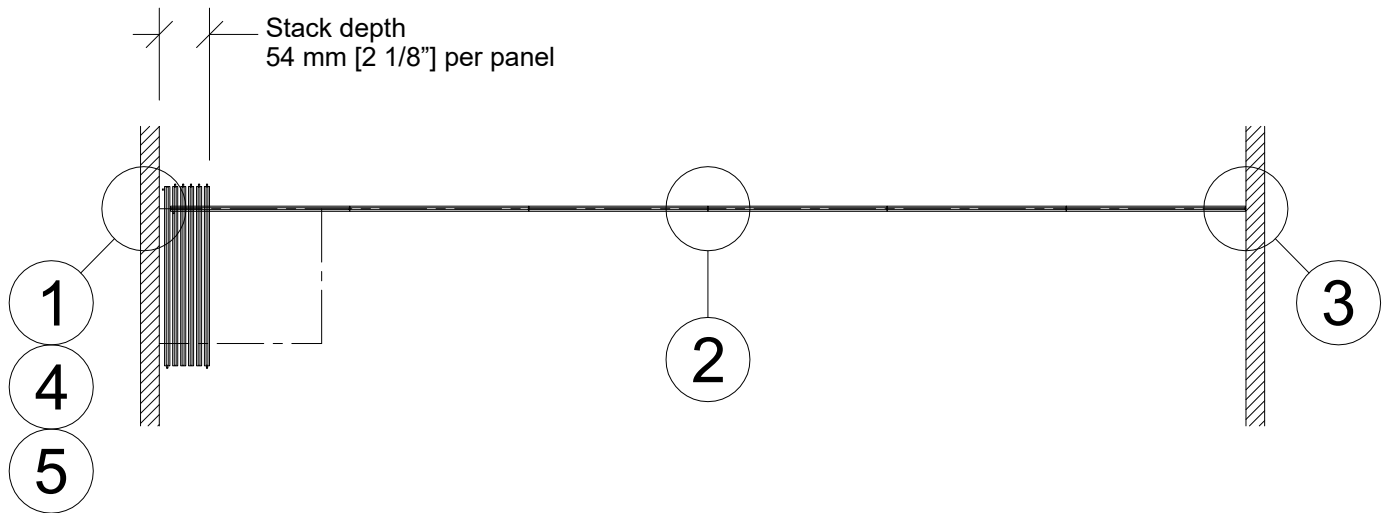


Wall to wall layout

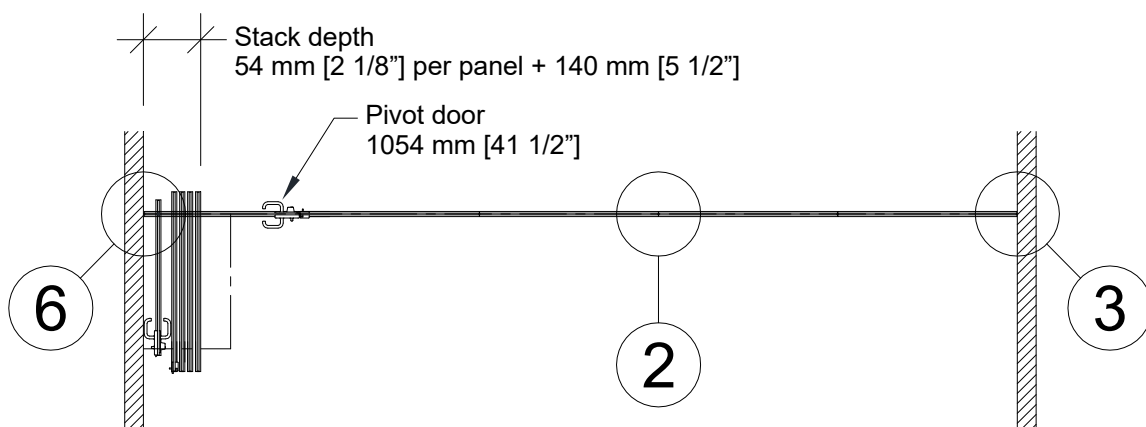

Pivot door


Horizontal Sections

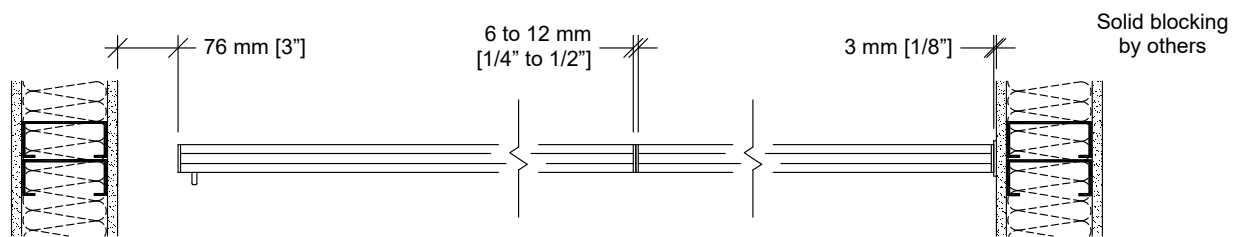


① Trail end

② Panel joint


③ Lead end

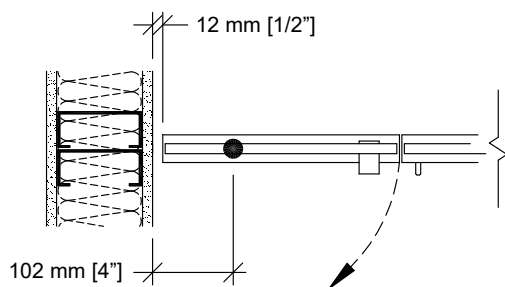

④ Optional pivot closure panel

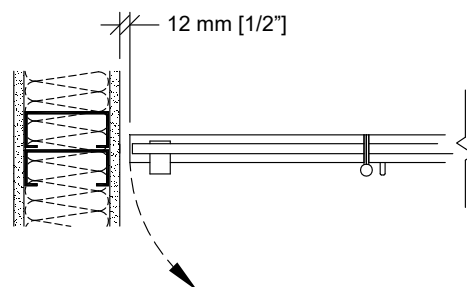


⑤ Optional flap closure panel

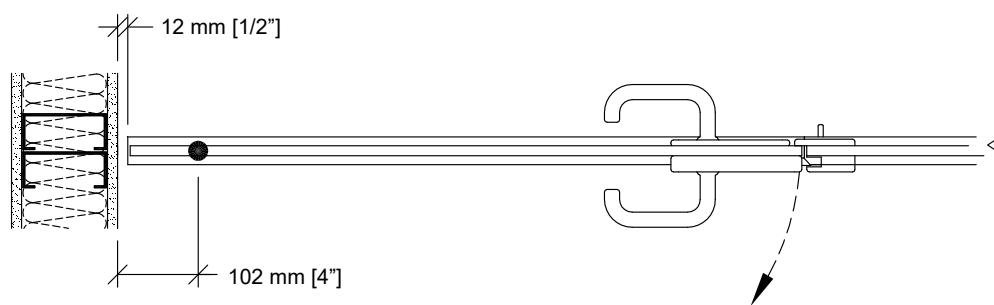


⑥ Optional pivot door


Floor Bolts




Edge-activated floor bolt.




Face-activated floor bolt.





Floor bolt lock.





Deadbolt floor lock with keyed cylinder.



Deadbolt floor lock with thumb turn.

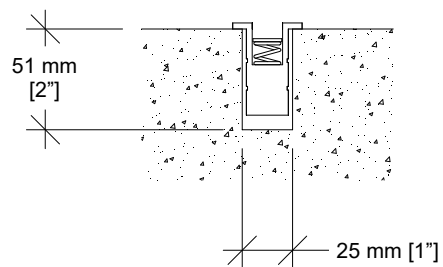


Dust-proof strike for floor bolt.

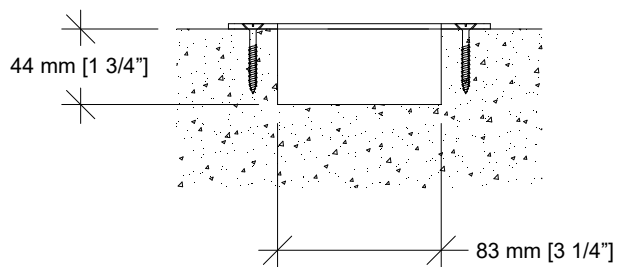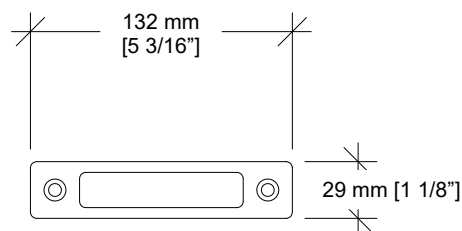


Strike for deadbolt floor lock.

Typical Layouts - #23-T Track

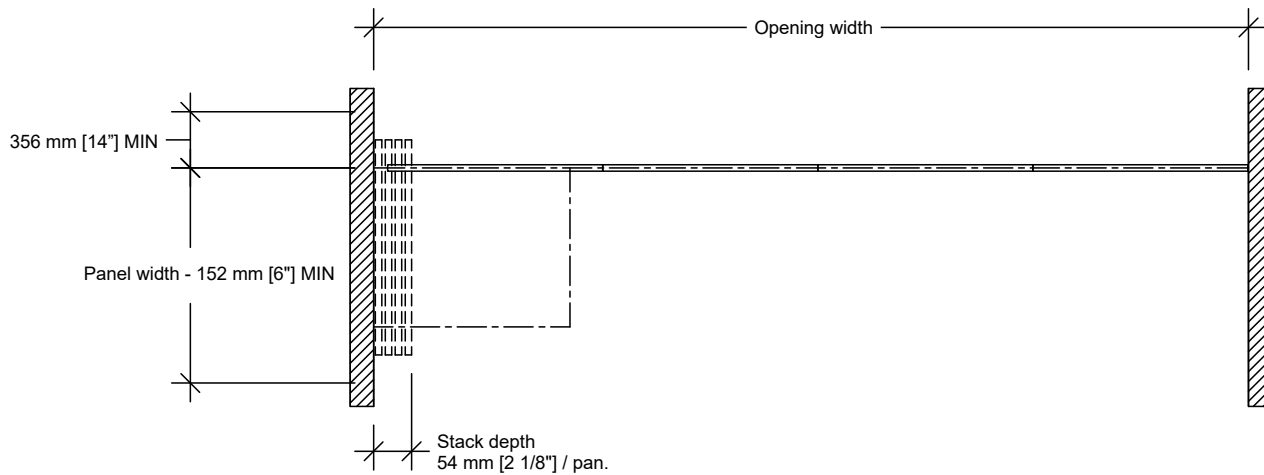


Wall to wall Side Stack

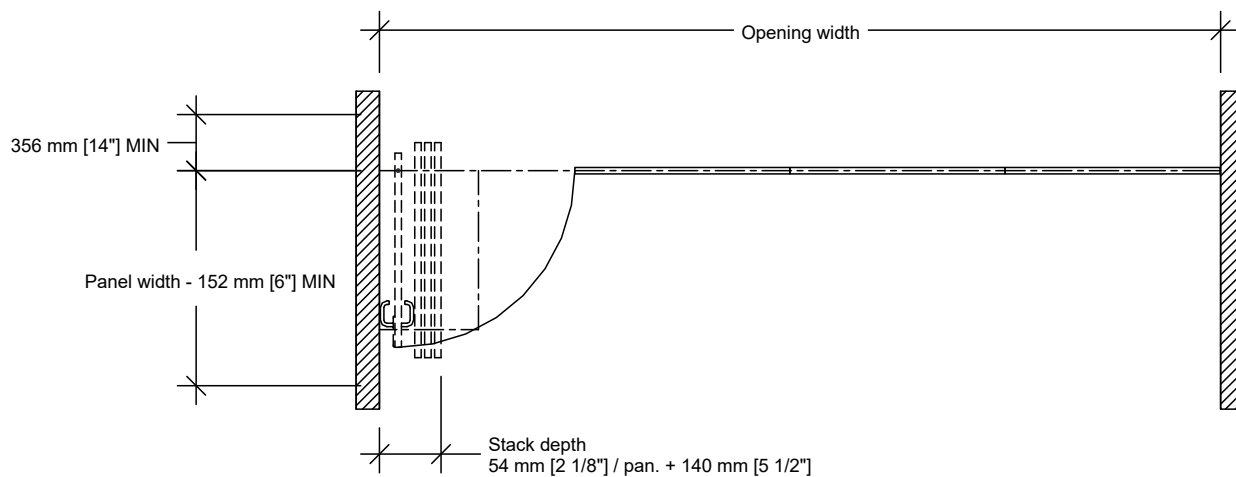


Wall to wall Side Stack – pivot door



Typical Layouts - #23-T Track (cont'd)

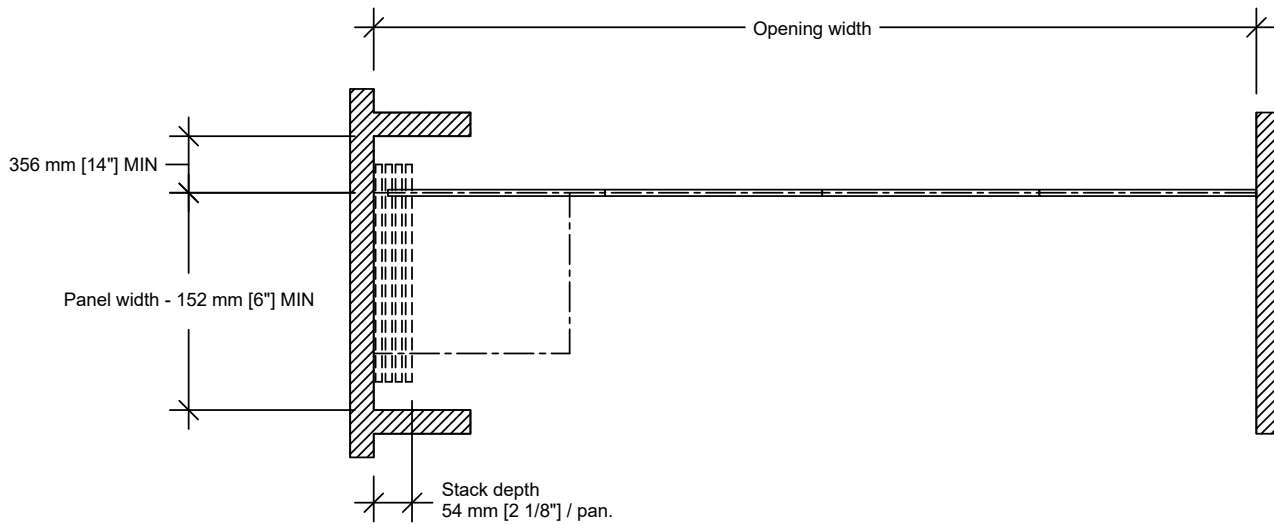


Pocket

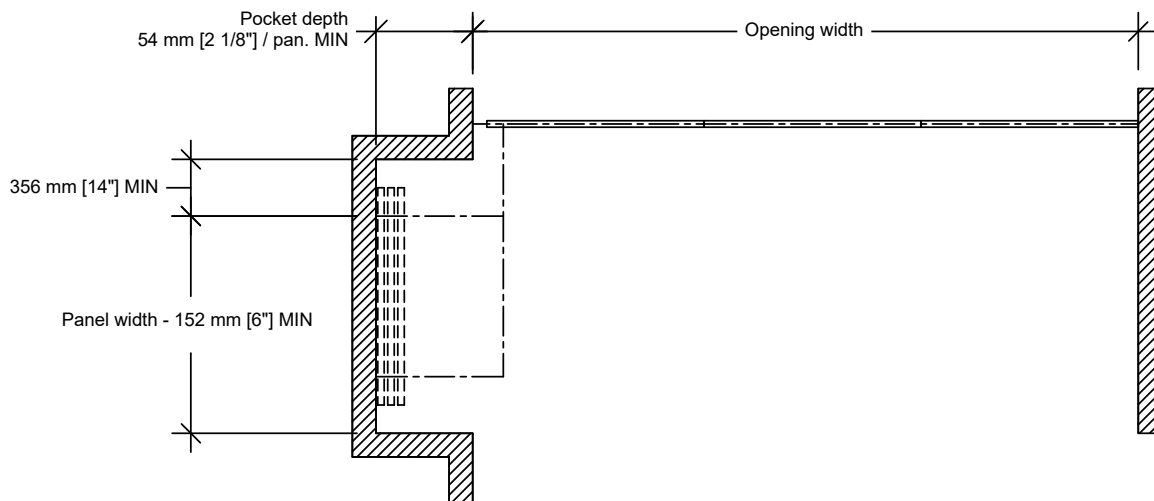

Remote Stack

Typical Layout - #72 Track

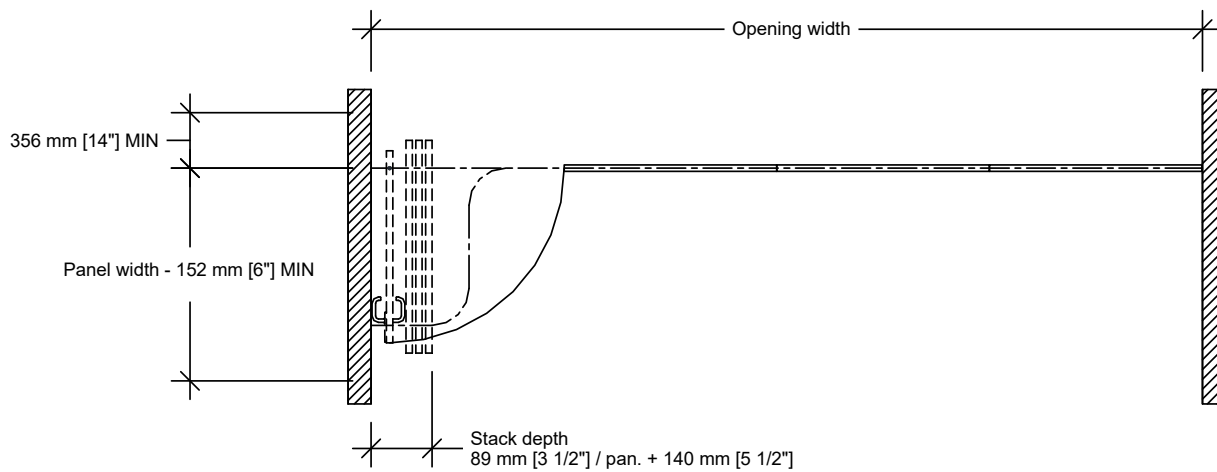

Wall to wall Side Stack – pivot door