





#321 Model – Centered glass



FEATURES ○ Profile thickness: 1 5/8" ○ Profile height: 1" ○ STC between 32 et 38 ○ Acoustic seals in the aluminum profile to protect the glass on all sides ○ Aluminum alloy 6063-T5	MAXIMUM OVERALL DIMENSIONS ○ Full height up to 10' ○ Standard width 4' or less	COLORS Standard anodized finishes      
DOOR TYPE ○ Glass door with hydraulic pivot	DOOR WIDTH ○ Pivot doors: between 28" & 38"	Painted: Choice of standard colors <i>Selection of our standard colors</i>      
GLASS THICKNESS ○ 5/16" Thick ○ 3/8" Thick	GLASS TYPES ○ Laminated ○ Tempered ○ Tempered Laminated ○ Colored ○ Textured ○ Digital print	


Technical Specifications

#321 Model – Centered glass



VERTICAL JOINT

- Polycarbonate molding
- Silicone
- Double-sided adhesive tape

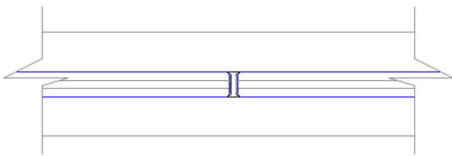


JONCTION HORIZONTALE

- Surface-mounted aluminum flat bar profile


90° JOINT

- Aluminum tube 1 1/2" x 1 1/2"
- Double-sided adhesive tape

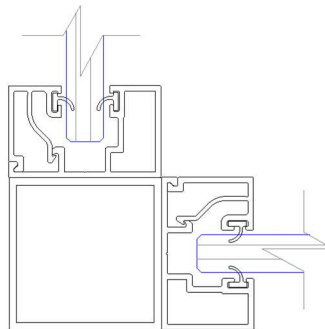

3-WAY JOINT

- Aluminum tube 1 1/2" x 1 1/2"

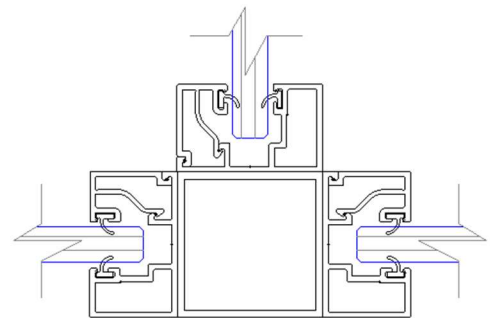

FLOOR MOUNTING

- Carpet
- Concrete
- Vinyl
- Ceramic

CEILING MOUNTING

- Gypsum
- Suspended ceiling with wood reinforcement

WALL MOUNTING

- Gypsum wall on both sides
- Gypsum wall on one side only

Technical Specifications

#321 Model – Centered glass

Elevation type

