


## Technical Data Sheet Vision 122

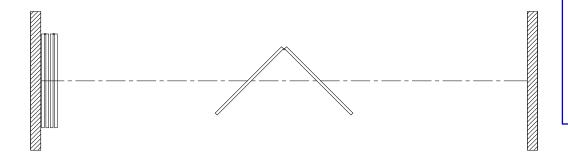

#### Features & Options

#### **Standard Features**


- Manually-operated paired-panel glass movable partition.
- 35 mm [1 3/8"] nominal thickness. Up to 1220 mm [48"] width.
- Clear 12 mm [1/2"] tempered glass faces with polished vertical edges.
- Clear anodized aluminum horizontal mouldings with brush seals.
- Each panel fitted with a foot bolt to stabilize the partition.
- Clear anodized 6063-T6 alloy aluminum track.
- Each panel supported by one dual horizontal wheel carrier with nylon tires over hardened precision ground steel ball bearing wheels.
- Steel hinges.
- Maximum height: 3658 mm [12'-0"].

#### **Optional Features and Accessories**

- Powder-coated horizontal mouldings and/or track.
- Glass finishes: stained, colored, acid washed, frosted, etc.
- 11 ga. steel track painted white.
- Floor bolt lock, one side.
- Deadbolt floor lock with
  - thumb turn cylinder, one side;
  - keyed and thumb turn cylinders;
  - keyed cylinder, one side;
  - keyed cylinders, both sides.
- Final closure by 305 mm [12"] pivot panel.
- Final closure by ADA-compliant pivot door. Optional pivot door hardware:
  - Floor-concealed door closer.
  - Lockable latch keyed on one side with thumb turn on other side.
  - Deadbolt floor lock with:
    - thumb turn cylinder, one side;
    - keyed and thumb turn cylinders;
    - keyed cylinder, one side;
    - · keyed cylinders, both sides.
  - Panic bar (with lockable lever on opposite side).
  - Architectural pulls with magnetic floor latch.




#### **Vertical Section**

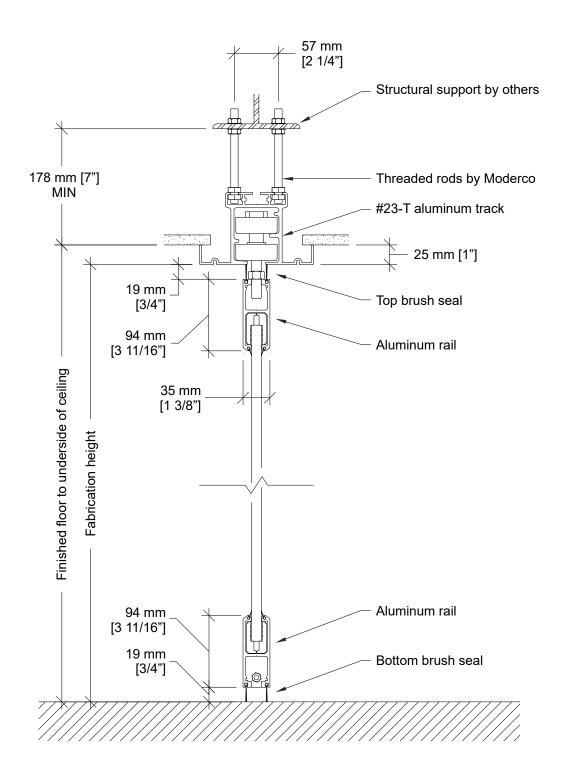




### **Track Options**




#23-T aluminum track

Standard track.

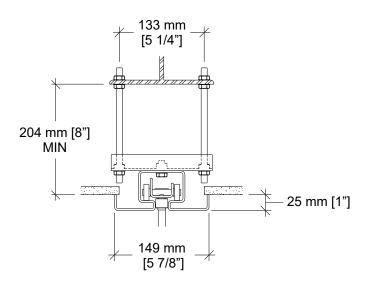

#72 steel track with hanger bracket

Optional track.





# #23-T aluminum track with optional hanger bracket


Hanger bracket required for installations where the topmost nuts cannot be used for adjustment.




## Elevations

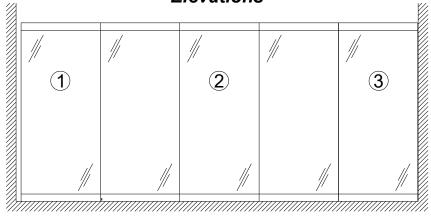








- 1- Lead panel
- 2- Intermediate panel
- 3- Trail panel
- 4- Optional pivot door


- 5- Optional pivot door with panic bar (and lockable lever on opposite side)
- 6- Optional pivot door with architectural pulls
- 7- Optional pivot closure panel



#### Plan Views

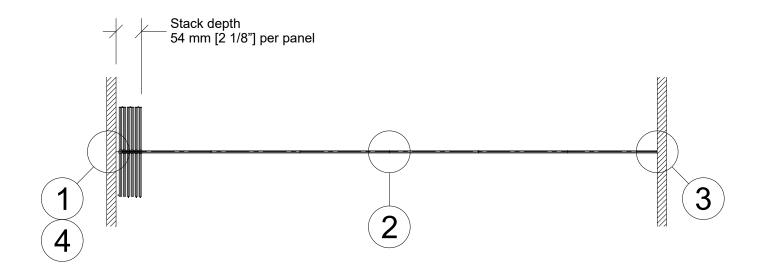


### Wall to wall layout

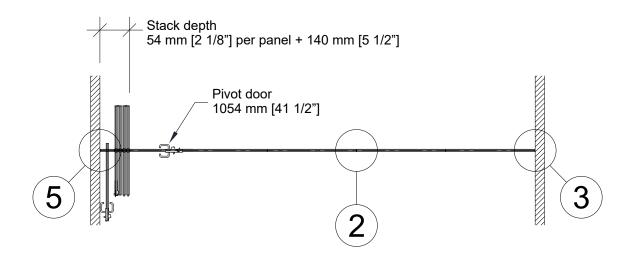

#### **Pivot door**




#### **Horizontal Sections**

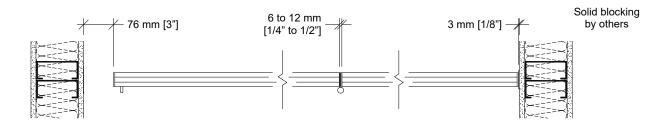


1 Trail end

2 Panel joint

2 Lead end





 $\stackrel{\frown}{4}$  Optional pivot closure panel

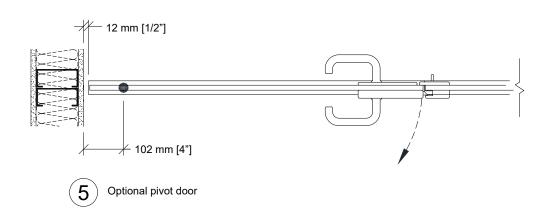






#### Floor Bolts












Edge-activated floor bolt.


Face-activated floor bolt.

Floor bolt lock.


Deadbolt floor lock with keyed cylinder.


Deadbolt floor lock with thumb turn.





Dust-proof strike for floor bolt.







Strike for deadbolt floor lock.



## **Typical Layouts**

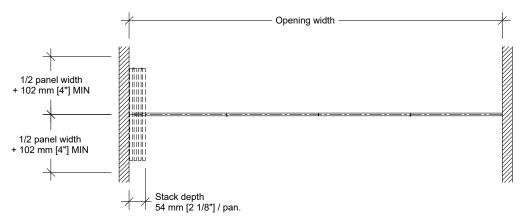

#### Wall to wall

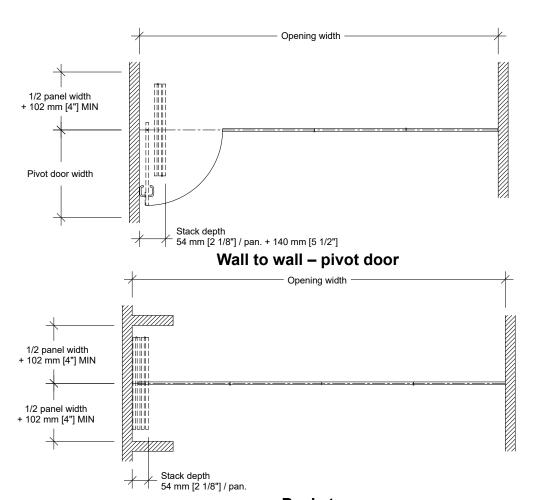

**Pocket**